

1

2

3

4

5

6

7

A

B

C

D

E

F

G

H

A

B

C


D

E


F

G

H

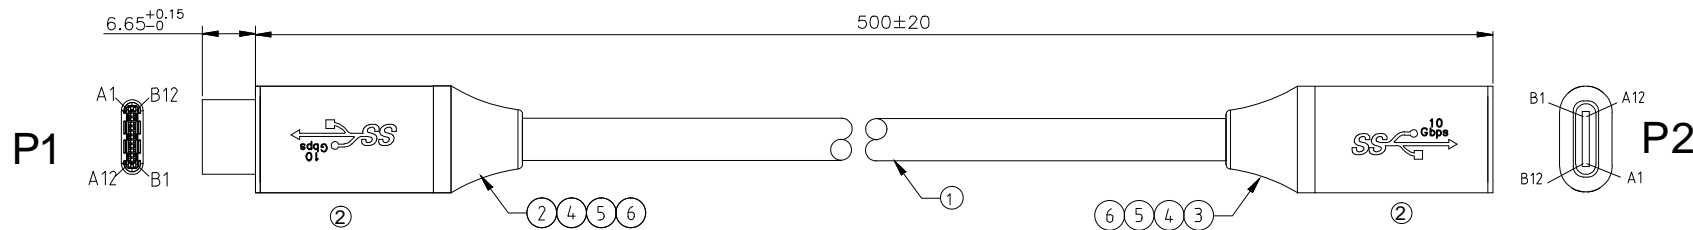

NOTE:  
 1. Transmission speed: 10Gbps  
 2. Conductive resistance: 3Ω Max  
 3. Insulation resistance: 5MΩ Min/300VDC, 10ms  
 4. 100% open, short, miswire test.

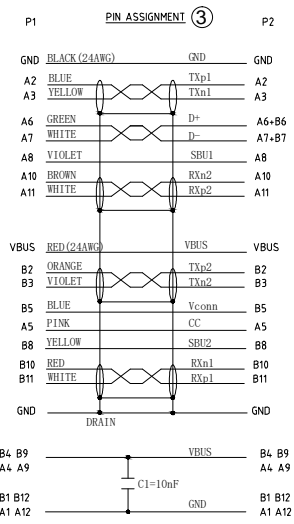

⑥	Shell	Type-C shell, gray, Aluminium alloy, printed USB 10G logo ②	2	PCS
⑤	Over mold	PVC 45P BLACK	NA	G
④	Inner mold	LD-PE	NA	G
③	CONN	Type-C female, contact GF, shell Ni plated, BK insulator	1	PCS
②	CONN	Type-C male, contact GF, shell Ni plated, BK insulator	1	PCS
①	CABLE	USB3.1 Type C cable (32AWG*1P+D+AL/MY)*4C+32AWG*1P+32AWG*4C +24AWG*2C+D+AB, OD:4.5MM, Black PVC ②	1	PCS
NO.	NAME	DESCRIPTION	Q'TY	UNIT

RoHS compliant  
Unit: mm

Scale	Free				Date	Name	Customer-No.
TOLERANCE					Drawn	Daniel	
		③	Update pin assignment	19.07.2023	Luca	Approved	19.07.2023
		②	Update specification	07.06.2023	Luca		
DIM	TOL	①	Update PN	24.04.2023	Daniel		
		①	Drawn	20.12.2022	Daniel		
Angle	TOL	ld.	Modification	Date	Name	ASSMANN WSW components	
						Drawing-No.	ASS 10358 CA rev03
						Replace	Sheet 1/1

1

2

3

4

5

6

7