



1 2 3 4 5 6 7

A

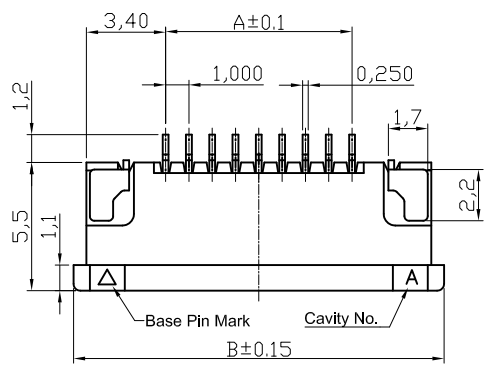



NOTES:

- 1.Body : High Temperature plastic UL94V-0
- ② 2.Slider : High Temperature plastic Nylon6T UL94V-0
Color Black
- 3.Contact : Copper Alloy ,Matte Tin plated over Nickel
- 4.Fixed tab : Copper Alloy with Matte Tin plated
- 5.Contact style :Downside Contact
- 6.Color : Nature

AFFC07-xx-100-SHB-x
Packing:
R= Tape & Reel
T= Tube

B






C

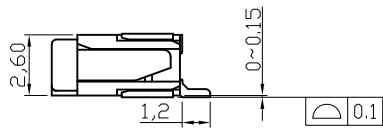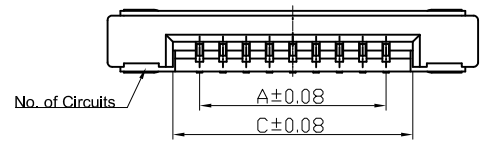

A=1.00 X NO. OF Spaces
B=A+8.0
C=A+2.1
* Available in 4 through 32 circuits

D

E

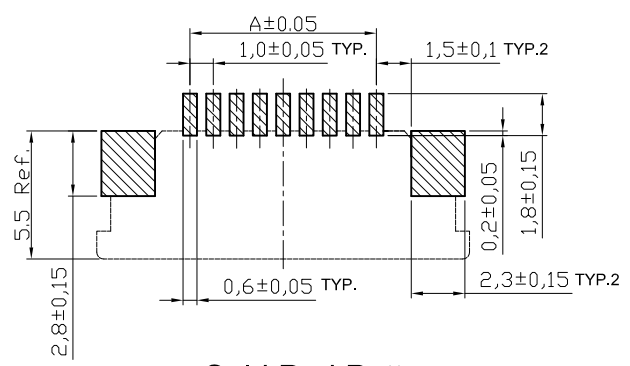

Sold Pad Pattern

Accommodated FFC

Accommodated FPC

RoHS compliant

Scale	1:1					Date	Name	Customer-No.
TOLERANCE					Drawn	03.08.2009	Dean	
.X	±0.15				Approved	25.07.2012	Winnie	ASSMANN WSW-No. AFFC07-xx-100-SHB-x
.XX	±0.10							Drawing-No.
.XXX	±0.05							
DIM	TOL	②	Update	25.07.2012	Lucas			
X.°	±1°	①	Drawn	03.08.2009	Dean			
X.X°	±X°							
Angle	TOL	Id.	Modification	Date	Name			

Customer-No.	
ASSMANN WSW-No. AFFC07-xx-100-SHB-x	
Drawing-No.	rev02
Replace	SHEET 1 / 2

H

A

B

C

D

E

F

G

H

1 2 3 4 5 6 7

1 2 3 4 5 6 7

A B C D E F

Dimensions

Circuits	E	F	W1	W2	W3
4-8	24.0	-	24.5	30.5	24.5
9-14	32.0	28.40	32.5	38.5	32.5
15-25	44.0	40.40	44.5	50.5	44.5
26-32	56.0	52.40	56.5	62.5	56.5

NOTES:

- 1.10 sprocket hole pitch cumulative tolerance±0.20
- 2.Carrier camber is within 1 mm in 100 mm
- 3.Material : Transparent Conductive Ploystyrene Alloy (UP-5000)100% recyclable
- 4.All dimensions meet EIA-481-3 requirements
- 5.Thickness : 0.33±0.03 mm
- 6.Packing length per 22" reel : 75.0 Meters
- 7.Component load per 13" reel: 2000 pcs

Scale : 1:5

Technical drawing of a carrier tape. The side view shows a length of $\phi 33.0 \pm 2.0$ mm, with a sprocket hole pitch of 100.0 mm. Dimensions for sprocket hole width are $W3^{+3.0}_{-0.5}$ and $W1^{+0.2}_{-0}$. The carrier width is $W2$ Max. The top view shows sprocket hole diameters of $\phi 13.0 \pm 0.2$ mm and $\phi 21.0 \pm 0.8$ mm, with a distance of 2.0 ± 0.5 mm between sprocket holes. A detail shows a cover tape leader area with a 230.0 Min. length and a 160.0 Min. connector packaging portion.

Technical drawing of a 24mm carrier tape. It shows sprocket hole diameters of $\phi 1.55 \pm 0.05$ mm and $\phi 2.0 \pm 0.1$ mm. Dimensions include $E \pm 0.3$, $(E/2) - 0.5 \pm 0.1$, 1.75 ± 0.1 , 12.0 ± 0.1 , 2.0 ± 0.1 , and 4.0 ± 0.1 . The width is labeled as **WIDTH:24mm Carrier**.

Technical drawing of a 32, 44, and 56mm carrier tape. It shows sprocket hole diameters of $\phi 1.55 \pm 0.05$ mm and $\phi 2.0 \pm 0.1$ mm. Dimensions include $E \pm 0.3$, $F \pm 0.1$, $F/2$, 12.0 ± 0.1 , 2.0 ± 0.1 , and 4.0 ± 0.1 . The width is labeled as **WIDTH:32,44,56mm Carrier**.

A B C D E F

RoHS compliant

Scale	Free					Date	Name	Customer-No.	
TOLERANCE						03.08.2009	Dean	ASSMANN WSW-No. AFFC07-xx-100-SHB-x	
X.									
X.X						25.07.2012	Winnie		
X.XX									
DIM	TOL	②	Update	25.07.2012	Lucas			Drawing-No.	
X.°	±1°	①	Drawn	03.08.2009	Dean			ASS 3613 CO	rev02
X.X°	±X°							Replace	SHEET 2 / 2
Angle	TOL	Id.	Modification	Date	Name				

G H

G H

1 2 3 4 5 6 7

svxxxx