

1 2 3 4 5 6 7

A A

B B

C C

D D


E E

F F

G G

H H

Notes
 Material:SR25
 Dielectric strength: 380kV/cm
 Heat resistance:215°C
 Tensile strength: 80N/mm

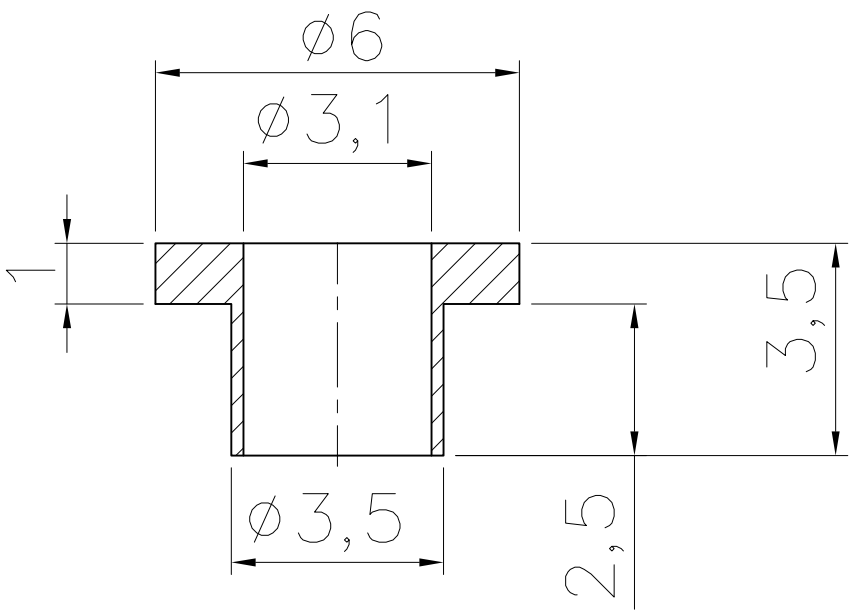

RoHS compliant

Scale	1:1						Date	Name	Customer-No.
TOLERANCE						Drawn	20.08.2009	Dean	
X.	±X					Approved	20.08.2009	Andy	ASSMANN WSW-No.
X.X	±X								V5830
X.XX	±X								Drawing-No.
DIM	TOL							ASS 0901 HS	rev01
X.°	±X°				Replace			Sheet	
X.X°	±X°	①	Drawn	20.08.2009	Dean				
Angle	TOL	Id.	Modification	Date	Name				

1 2 3 4 5 6 7