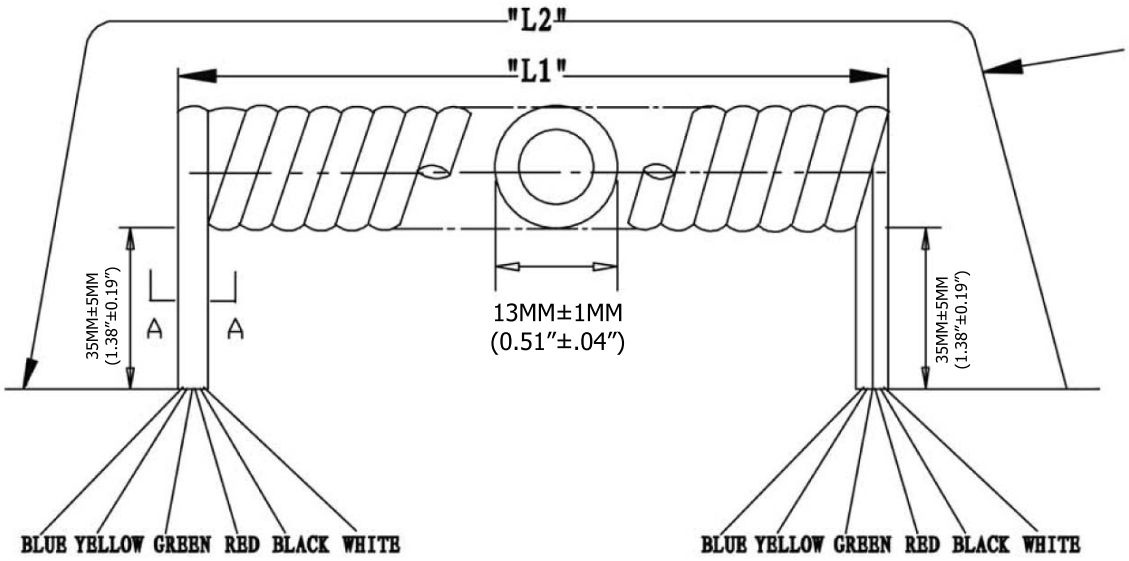

Extended length is with 500g of force

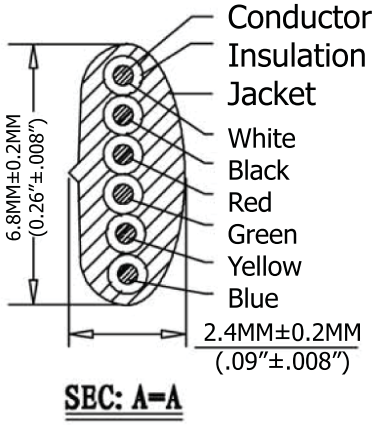

SEC: A=A

Extended Length ("L2")	Typical Retracted Length ("L1")
60.0 Inches - 69.0 Inches	21.5 Inches
1,524.0MM-1,752.6MM	546.1MM

Material:

- Conductor(X6C): 26AWG (0.12X12) Bare Copper
- Insulation(X6C):PP6331 ID 0.95-1.0
- Jacket: PVC NO UL 80P
- Package: Individual PE Bag

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	12.19.11	Chappell
Approved		

ASSMANN WSW components

Item No. AT-K-C-26-6-B/5-R

Title NON-UL 26AWG (0.16/7)*6C, O.D.: 2.4*6.8MM, Pre-Cut, 5Ft., Black

Drawing No. **rev00**

Replace | Sheet