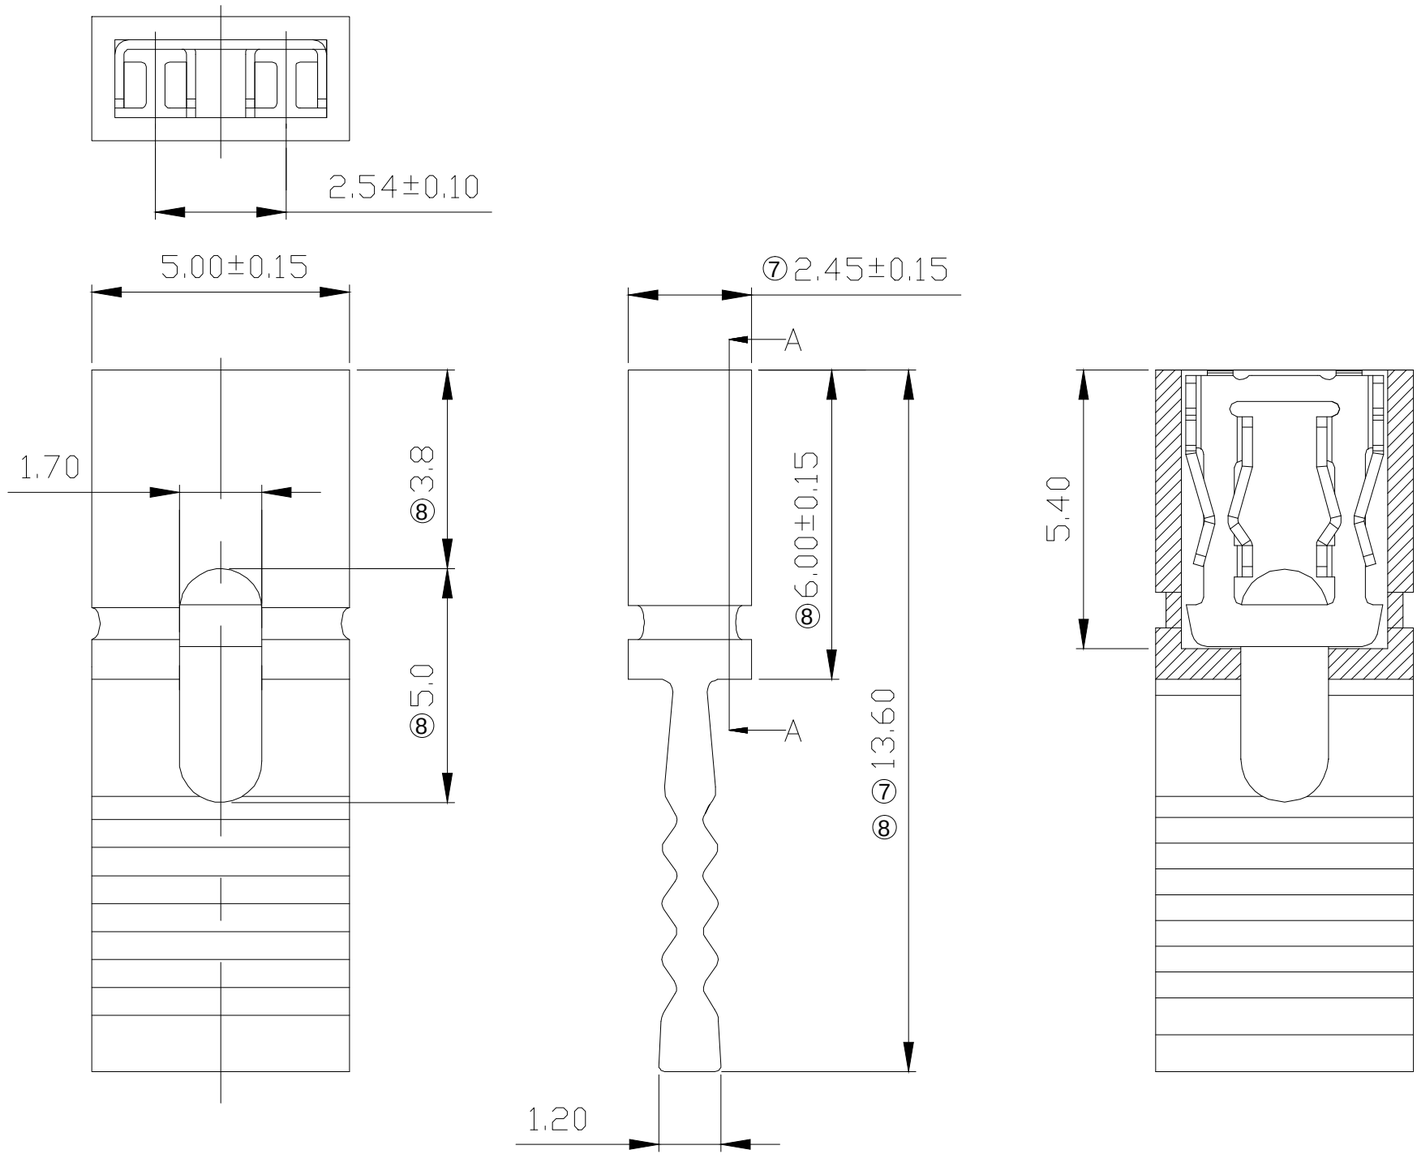

NOTES:

1.Insulation: Nylon 66, UL94V-0
2.Contact : Brass
⑧⑥ 3.Plated: Gold Flash or Tin over Nickel
4.Current Rating: 3A Max
5.Dielectric Voltage: 1000V rms / 1 minute
6.Insulation Resistance: 1000M ohm Min.
7.Contact Resistance: 30m ohm Max.
8.Operating and Storage Temperature: -40°C ~ +105°C
③ 9. Mating Cycles: 10 Min.
⑨ 10. Insertion Force:0.6±0.2kgf
⑨ 11. Withdrawal Force:0.2±0.1kgf
⑧⑤ AKSPLTx xx

Color:
RED
BLACK

Contact Area Plating:
G: Gold Flash
Z: Tin plated

RoHS compliant
Unit:mm

Scale	Free
⑧TOLERANCE	
X.	±0.35
X.X	±0.25
X.XX	±0.20
X.XXX	±0.15
DIM	TOL
Angle	TOL

Id.	Modification	Date	Name
⑨	Add the notes	22.05.2025	Peter
⑧	Update the dimension and tolerance	25.07.2022	Peter
⑦	Change the plant	20.04.2022	Winnie
⑥	Update plated information	20.08.2015	Ray
⑤	Add the order code: AKSPLTx RED	13.01.2014	Winnie
④	Order code correction	07.01.2014	Winnie

	Name	Date
Drawn	Hellwig	21.03.2007
Approved	Peter	22.05.2025

ASSMANN WSW components
A company of BCS

Description. Jumper Connector

ASSMANN WSW-No. ④ AKSPLTx BLACK
⑤ AKSPLTx RED

Drawing-No. ASS 0327 CO

rev09

Customer-No.

SHEET 1 / 1