


NOTE:  
 Material: C1100 T=0.6mm  
 Finish: Bright tinned.  
 Thickness:3-5um  
 Packing : 250pcs =1 reel  
 ① Thermal resistance: 15K/W

TAPE & REEL PACKING DETAILS

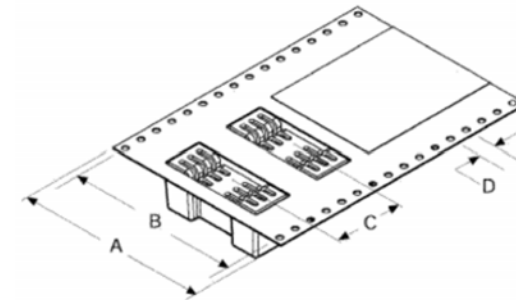

DIM A	DIM B	DIM C	DIM D
44	40.5	24	4

Unit : mm

②	PART NO.	PACKING	REMARK
	V-1101-SMD/A-L	BULK	
	V-1101-SMD/A	TAPE & REEL	250PC=1REEL

**RoHS compliant**  
Unit: mm

Scale	Free				Date	Name	Customer-No.
TOLERANCE					Drawn	Alex	
					Approved	Amy	
Unit	±0.3	②	Change WSW No.	16.04.2013	Amy		ASSMANN WSW-No. ② V1101-SMD/A V1101-SMD/A-L
DIM	TOL	①	Update	12.03.2013	Amy		Drawing-No.
		③	Drawn	25.11.2010	Alex		<b>ASS 0997 HS</b>
Angle	TOL	Id.	Modification	Date	Name		rev02



ASS 0997 HS  
rev02  
Replace Sheet

1

2

3

4

5

6

7

A

B

C

D

E

F

G

H

A

B

C

D

E

F

G

H

1

2

3

4

5

6

7