

1

2

3

4

5

6

7

A

A

B

B

C

C

D

D

E

E

F


F

G

G

H

H

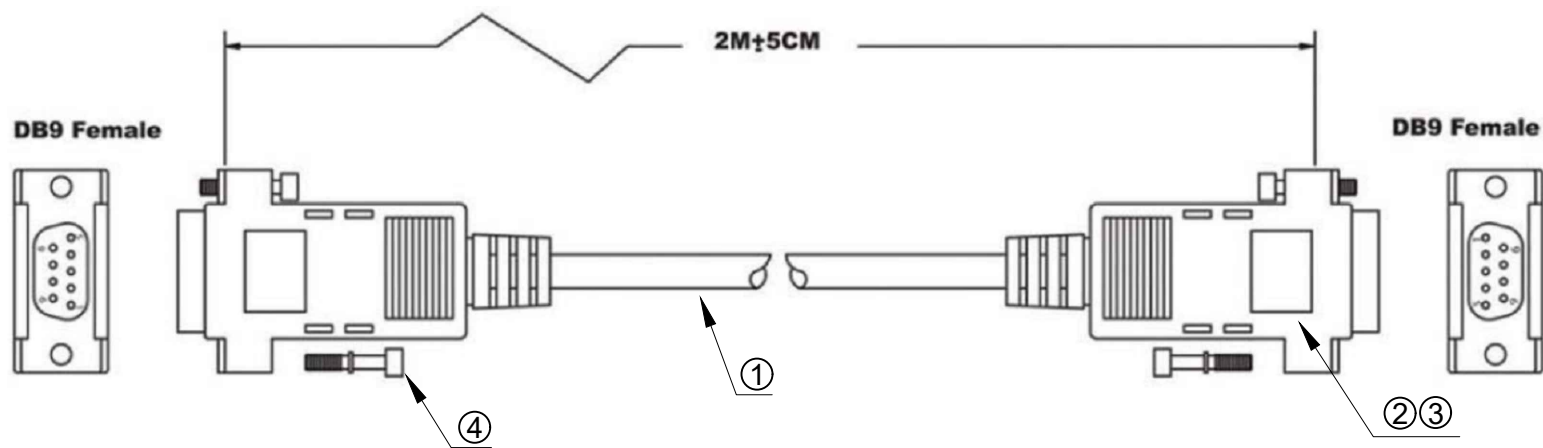

Configuration: One by One

DB9F DB9F

1	_____	1
2	_____	2
3	_____	3
4	_____	4
5	_____	5
6	_____	6
7	_____	7
8	_____	8
9	_____	9
Shield	_____	Shield

④	Screw	#4-40UNC	4	pcs
③	Housing	Snap Hood, Assembly type	2	pcs
②	CONN.	DB9 Female, normal type	2	pcs
①	CABLE	28AWG, 9C+1+AL/MY,Beige, PVC Jacket, OD:5.0	1	pcs
NO:	NAME	DESCRIPTION	Q'TY	UNIT

RoHS compliant

Unit: mm

Scale Free

TOLERANCE

X.X ±0.40

X.XX ±0.25

X.XXX ±0.15

DIM TOL

Angle ±3°

Angle TOL

①

②

③

④

⑤

⑥

⑦

Drawn

Modification

09.11.2021

Daniel

Date

Name

Date

Name

Description:

Serial Connector cable for 9 pin interface
D-sub 9Pin Female To D-sub 9Pin Female

ASSMANN WSW-No.

AK231-2

Drawing-No.

ASS 10078 CA

rev00

Customer-No.

Sheet

1 / 1

1

2

3

4

5

6

7