


A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

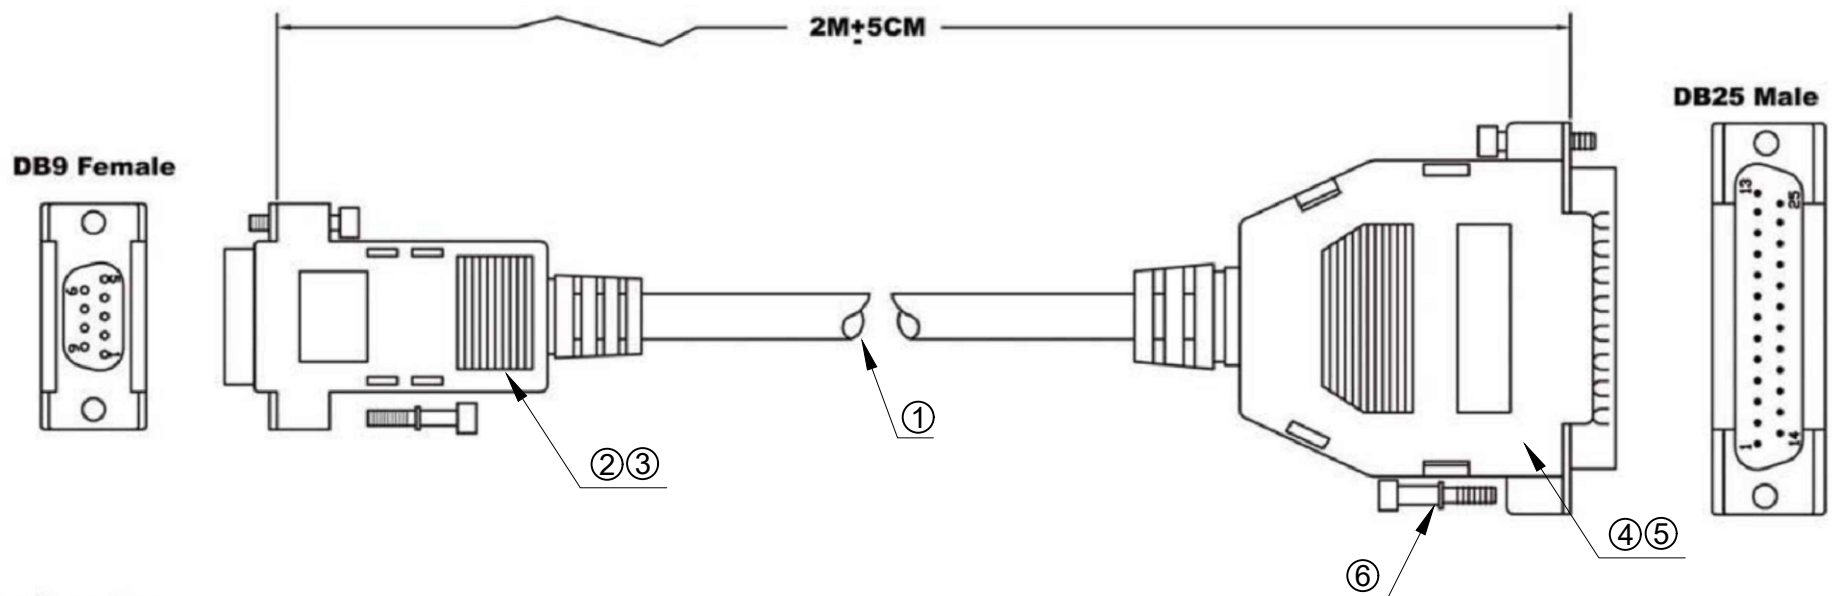

Configuration:

DB9F	DB25M
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
Shield	Shield

⑥	Screw	#4-40UNC type	4	pcs
⑤	Housing	Speed Hood for DB25, Assembly type	1	pcs
④	CONN.	DB25 Male, normal type	1	pcs
③	Housing	Speed Hood for DB9, Assembly type	1	pcs
②	CONN.	DB9 Female, normal type	1	pcs
①	CABLE	28AWG, 9C+1+AL/MY,Beige, PVC Jacket, OD:6.0	1	pcs
NO:	NAME	DESCRIPTION	Q'TY	UNIT

RoHS compliant
Unit: mm

Scale	Free	Date	Name	Description:
TOLERANCE		Drawn	08.11.2021	Daniel
X.X	±0.40	Approved	08.11.2021	Daniel
X.XX	±0.25			
X.XXX	±0.15			
DIM	TOL			
Angle	±3°			
Angle	TOL	①	Drawn	08.11.2021
		Id.	Modification	Date
			Name	



Description: Null Modem Cable 2.0 Meter	
ASSMANN WSW-No. AK125-2	
Drawing-No. ASS 10080 CA	rev00
Customer-No.	Sheet 1 / 1