


- 1.Material:  
Contacts :Brass  
Housing: PBT+30% G.F. UL 94V-0;Black
- 2.Electrical:  
Current-max[amps] 0.3AMP DC30V  
Withstanding Voltage 1000V AC MIN.  
Contact Resistance [ohms] 30 milliohms max  
Insulation Resistance [ohms] 100 Megohms min
- 3.Plating:  
Contacts: Full gold flash
- 4.Environmental  
Temperature Range -25°C~+85°C

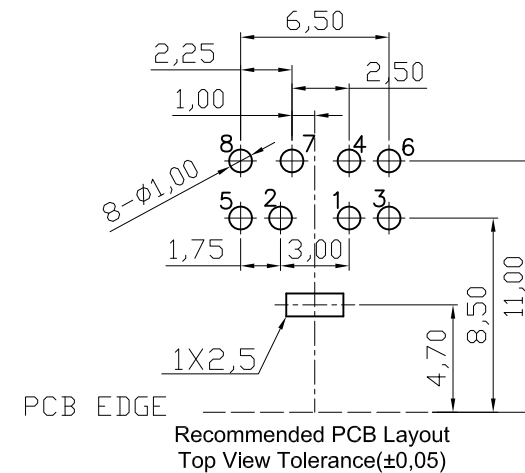

**RoHS compliant**

Scale	1:1						Date	Name	Customer-No.	
TOLERANCE						Drawn	06.12.2006	Hellwig		
X.X	±0.38									
X.XX	±0.25	④	Modify the PCB layout	21.04.2011	Rale	Approved	21.04.2011	Hellwig	ASSMANN WSW-No. <b>A-DIO-M08</b>	
X.XXX	±0.15	③	Change the manufacture plant	25.11.2010	Alex					
DIM	TOL								Drawing-No.	
X.°	±1°	②	Update	15.07.2009	Rale	<b>ASSMANN</b> WSW components			<b>ASS 1012 CO</b>	rev04
X.X°	±X°	①	Drawn	06.12.2006	Hellwig				Replace	Sheet
Angle	TOL	Id.	Modification	Date	Name					

**RoHS compliant**



Customer-No.	
ASSMANN WSW-No. <b>A-DIO-M08</b>	
Drawing-No.	rev04
<b>ASS 1012 CO</b>	Sheet
Replace	