


① WSW P/N	Length (mm)
AMJU2020-0050-BKB-24	500 ± 15
AMJU2020-0100-BKB-24	1000 ± 30
AMJU2020-0200-BKB-24	2000 ± 50
AMJU2020-0500-BKB-24	5000 ± 100

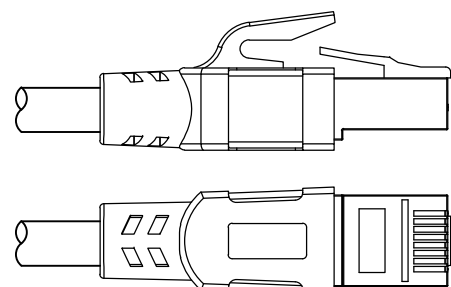

PIN ASSIGNMENT			
P1		P2	
1	white	1	
2	orange	2	
3	white	3	
6	green	6	
4	blue	4	
5	white	5	
7	white	7	
8	brown	8	
Shell	Braid	Shell	

NOTES :  
 1). 100% OPEN & SHORT TESTING  
 2). CONDUCTOR RESISTANCE: 5Ω MAX  
 3). INSULATION RESISTANCE: 300V DC/10MΩ MIN  
 4). CAT8 CABLE: 2000Mhz, 25Gbps/40Gbps  
 5). CABLE IMPEDANCE: 100±15Ω

③	OVERMOLD	65P PVC COLOR:BLACK	NA	KG
②	CONNECTOR	RJ45 plug 8P8C Contacts:1u" Gold SHELL:Gold Plated UL94V-2	2	PCS
①	CABLE	CAT8 SF/FTP Cable,[24AWG(1/0.51 BC)*1P+AL]*4C+AL +DRAIN(7/0.12BC)+BRAIN(64/0.12ALM) +BLACK PVC JACKET. OD=8.0±0.3MM.	1	PCS
NO.	NAME	DESCRIPTION	QTY	UNIT

G	RoHS compliant Unit: mm	Scale	Free				Date	Name	Description: <b>Modular Cable</b>	
		TOLERANCE		Drawn	27.07.2022	Luca				
H		DIM	TOL	①	Change part numbers	26.04.2023	Luca	ASSMANN WSW-No. ① AMJU2020-xxxx-BKB-24	Drawing-No. <b>ASS 10236 CA</b>	rev01
				②	Drawn	27.07.2022	Luca			
		Angle	TOL	Id.	Modification	Date	Name	Customer-No.	Sheet 1/1	
		<b>ASSMANN</b> WSW components								