

1

2

3

4




5

6

7

A

A

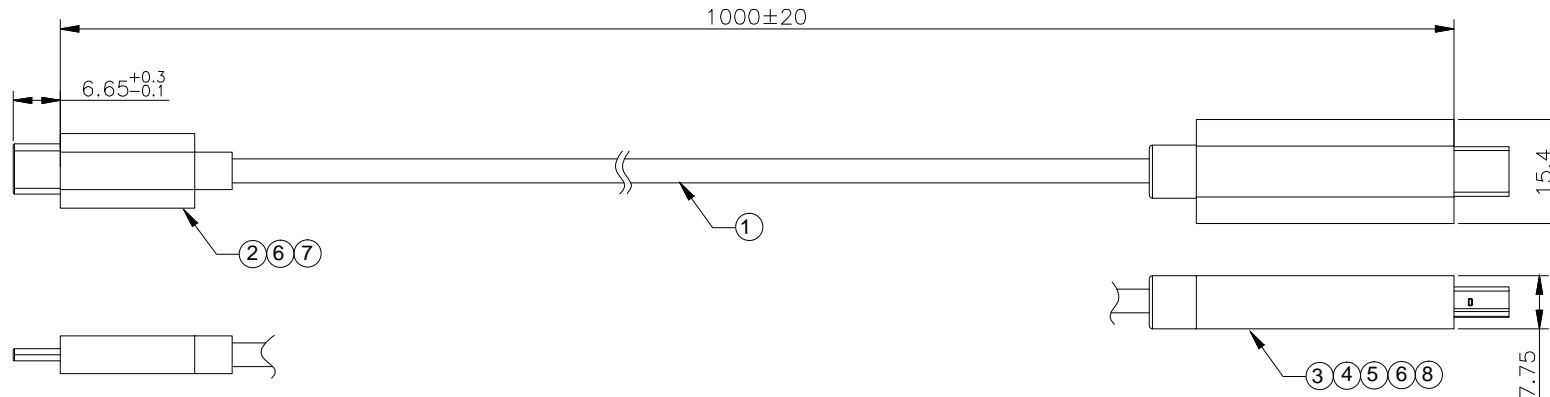

B

B

C

C

D

D

E

E


NOTE:

- 1.Resolution of the signal source:UXGA 7680*4320P 60Hz
- 2.Contact resistance: 3Ω Max
- 3.Insulation resistance:5MΩ Min/300VDC, 10ms
- 4.100% open,short,miswire test.

F

F

② PIN-OUT

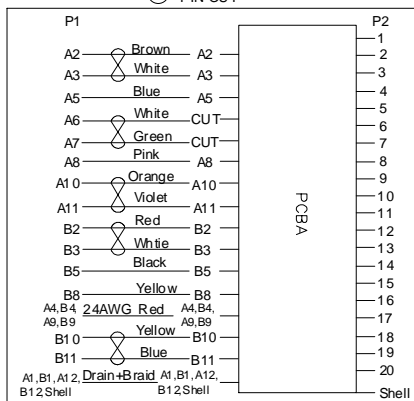

⑧	Shell	Mini DP aluminum alloy shell, black	1	PCS
④	Shell	Type-C, shell_black	1	PCS
⑥	Over mold	PVC 45P BLACK	NA	G
⑤	Inner mold	LD-PE	NA	G
④	PCBA	Type-C to DP PCBA	1	PCS
③	CONN	Mini DP male, WH insulator, contact Gold flash, shell gold plated	1	PCS
②	CONN	Type-C male, solder type, contact Gold flash, shell gold plated	1	PCS
①	CABLE	(32AWG*2C+AM)*4C+32AWG*1P+32AWG*3C+28AWG*1C+24AWG*1C+E+AB(80%),OD:4.2mm,BK PVC jacket	1	PCS
NO.	NAME	DESCRIPTION	Q'TY	UNIT

G

G

RoHS compliant

Unit: mm

Scale Free

TOLERANCE

Date

Name

Description:

Type C to Mini DP Cable

ASSMANN WSW-No.

A-USB31C-01M-100

H

H

DIM TOL

② Update pin-out 19.07.2023 Luca

① Update PN 24.04.2023 Daniel

① Drawn 20.12.2022 Daniel

Angle TOL

Id. Modification Date Name

Drawing-No.

ASS 10361 CA

rev02

Replace

Sheet

1/1

1

2

3

4

5

6

7