

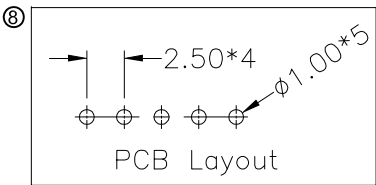

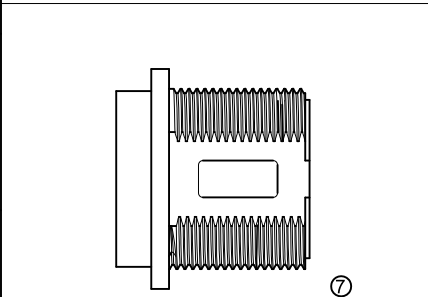


USB 2.0 COMPLIANT

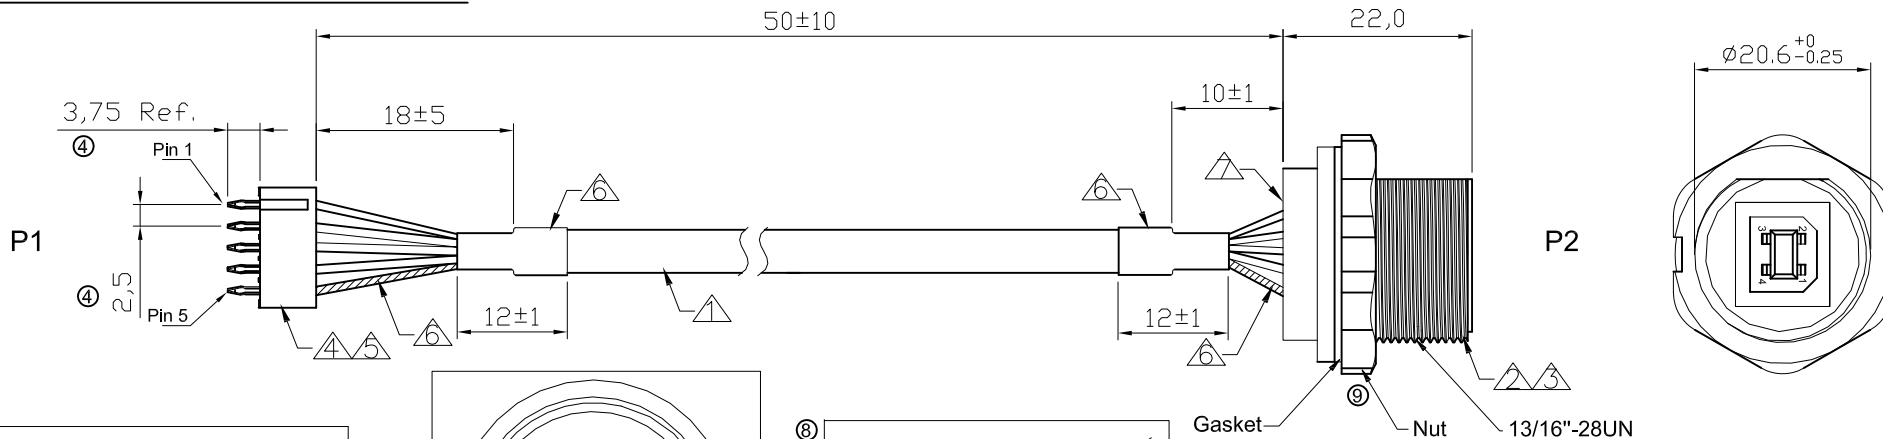

- ⑦ Testing Conditions:
1. Voltage: 300V DC/0.01;
 2. Insulation Resistance: 10Mohms min;
 3. Conductive Resistance: 5Ohms max;
 4. 100% open and short electrical test;
 5. Waterproof Rating: IP67;
 - ⑨ 6. Recommended use torque force: 1.0Nm Max.

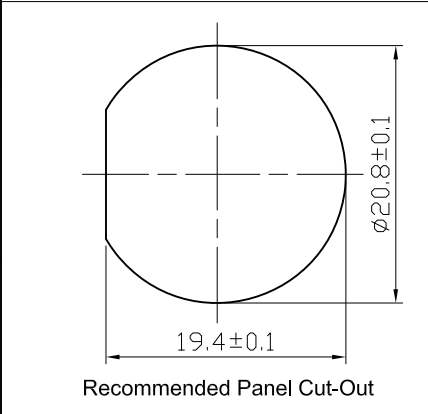

WIRE LIST

P1	PAIR	COLOR	P2
1	—	RED (24AWG)	1
2	—	WHITE (28AWG)	2
3	—	GREEN (28AWG)	3
4	—	BLACK (24AWG)	4
5	—	DRAIN	SHELL

⑧	⑦	ITEM	SPECIFICATION	Q'TY	UNIT
⑦	③	Black glue A/B (ethoxyline resin)		3	g
⑥	④	BLACK HEAT SHRINKABLE CASING		4	PCS
⑤	⑤	TERMINAL:PHOSPHOR BRONZE. TIN-PLATED JWT:B2512TOP-2		5	PCS
④	④	HOUSING: PH2.5MM 5PIN JWT:B2512H00-05P		1	PCS
③	③	ABS 94V-0. BLACK 13/16"-28UN SHELL		1	SET
②	②	USB B/M CONNECTOR SOLDER		1	PCS
①	①	USB 2.0 28AWG*1P+24AWG*2C+AL.MY+D+B UL2725 JACKET BLACK PVC OD=5.0±0.2mm (UV RESISTANT)		1	PCS
⑦	⑦	ITEM	SPECIFICATION	Q'TY	UNIT

Scale	Free	⑧	⑦	⑥	⑤	④	③	②	①	Date	Name	Customer-No.
TOLERANCE	±0.5	⑧	Update the nut and notes	07.12.2020	Segal							
		⑧	Add PCB layout	18.07.2018	Xavier	Drawn	20.08.2004	Helwig				
		⑦	Cancel "A" logo add notes	03.04.2018	Tom	Approved	07.12.2020	Winnie				ASSMANN WSW-No.
		⑥	Add USB 2.0 compliant	27.08.2012	Ray							A-USB-BPFS
		⑤	Add PCB layout and Pin detail	16.07.2012	Lucas							Drawing-No.
		④	Dimension add in	11.07.2012	Lucas							ASS 1576A CA rev09
		Id.	Modification	Date	Name			Replace				Sheet 1/1

RoHS compliant
Unit: mm



ASS 1576A CA rev09

Replace Sheet 1/1