
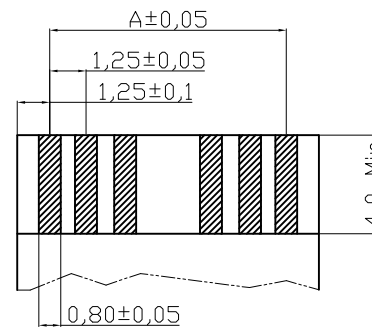


**NOTES:**

- 1.Body :Glass filled polyester UL94V-0 Color Nature
- 2.Contact : Phosphor Bronze
- 3.Plating : Tin plated over Nickel
- 4.Entry option: Right angle
- 5.Packing: Tube


A= 1.25x No. of Spaces  
 B= A + 7.05  
 C= A + 2.7  
 \*Available in 3 through 32 circuits

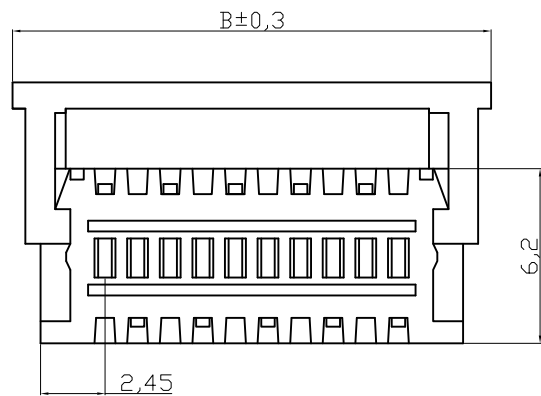

**Accommodated FFC/FPC**  
 (Thickness:0.3mm±0.05)

③ WAVE soldering:

Solderability	Soldering Time: 5±0.5sec Soldering Pot: 230±5°C
Resistance to Soldering Heat	Soldering Time: 5±0.5sec Soldering Pot: 260±5°C

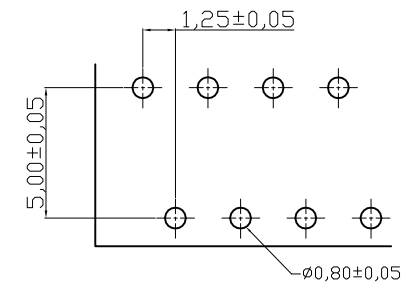

**Recommended PCB Layout**

**RoHS compliant**

Scale	1:1					Date	Name	Customer-No.	
TOLERANCE						Drawn	13.11.2008	N.Schulz	
.X	±0.15					Approved	17.02.2012	Hellwig	
.XX	±0.10							ASSMANN WSW-No. AFFC01-xx-125-THT-T	
.XXX	±0.05	③	Add Wave soldering Data	17.02.2012	Lucas			Drawing-No.	
DIM	TOL	②	Redraw	03.08.2009	Dean			<b>ASS 2880 CO</b>	rev03
X.°	±1°	①	Drawn	13.11.2008	N.Schulz			Replace	SHEET
X.X°	±X°								
Angle	TOL	Id.	Modification	Date	Name				