

1

2

3

4

5

6

7

A

B

C

D

E

F

A

B

C





D

E

F

**NOTES:**

- 1.ENVIRONMENTAL:  
Temperature Range : -20°C To +80°C
- 2.MATERIAL:  
Insulator Material:Glass-filled thermoplastic Natural,UL94V-0  
Contact Material: Brass ,Gold flash on contact area  
Shell :SPCC , Sn plated over Nickel  
Board lock : Brass Tin Plated
- 3.ELECTRICAL  
Contact Resistance: 20mΩ Max  
Insulation Resistance: 1000MΩ min  
Withstand Voltage: 500V AC(ms)
- 4.MECHANICAL  
Mating force : 10 LB.(4.5Kg) Max  
Unmating Force :2.2LB.(1Kg) Min .8.8LB.(4Kg)Max.

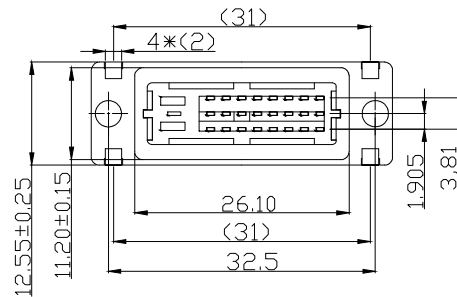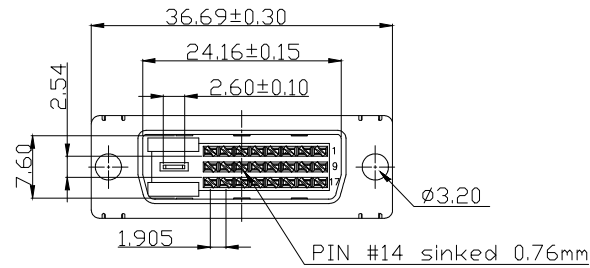

**RoHS compliant**

Scale	1:1					Date	Name	Description
TOLERANCE						Drawn	29.12.2008	Dean
X.	±0.50					Approved	26.04.2021	Daniel
X.X	±0.38							
X.XX	±0.25							
DIM	TOL	②	Update	26.04.2021	Daniel			
X.°	±3°	①	Drawn	29.12.2008	Dean			
X.X°	±1°							
Angle	TOL	Id.	Modification	Date	Name	Customer-No.		Sheet 1/1

ASSMANN WSW-No.  
**A-DVI-24D**

Drawing-No.  
**ASS 3271 CO** rev02

1

2

3

4

5

6

7

H