

1

2

3

4

5

6

7

A

B

C

D

E

F

G

H

A

B

C

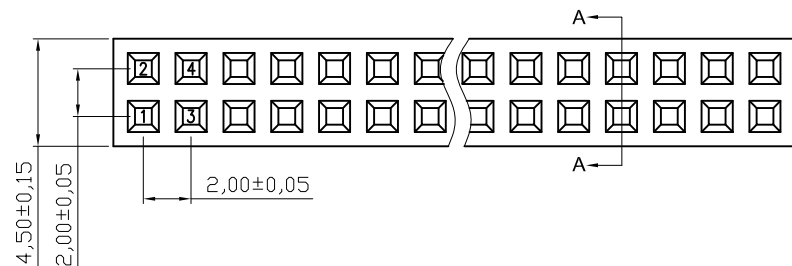
D

E

F

G

H

**NOTES:****MATERIAL**

1. Insulator Material: PA6T+30%GF(UL94V-0), Black
2. Contact Material : Phosphor Bronze
3. Contact Plating : Tin Over Ni

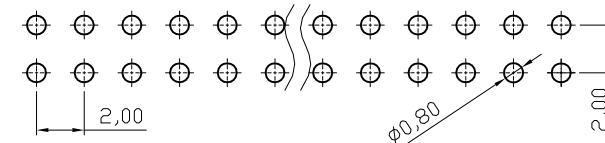

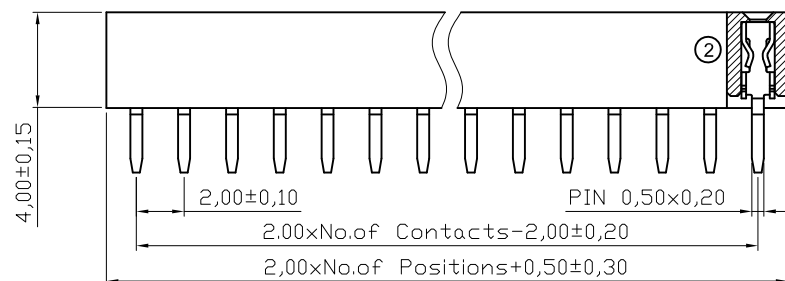
**ELECTRICAL**


1. Current Rating : 2.0AMP
2. Withstand Voltage : 500V AC/DC
3. Contact Resistance : 20mΩ max
4. Insulation Resistance: 1000MΩ min

**ENVIRONMENTAL**

1. Operation Temperature: -40°C to +105°C
2. Packing : Tube

**Recommended PCB Layout(Top Side)**  
(PCB BOARD TOLERANCE±0.05)

**SECTION A-A****RoHS compliant**

Scale	1:1					Date	Name	Customer-No.	
TOLERANCE						Drawn	18.12.2009	Dean	
X.X	±0.40					Approved	19.06.2010	Hellwig	
X.XX	±0.25								
X.XXX	±0.15								
DIM	TOL	②	Change terminal	19.06.2010	Dean				
Angle	±3°	①	Drawn	18.12.2009	Dean				
		Id.	Modification	Date	Name				
								ASSMANN WSW-No. <b>A-BL200-DG-ZxxD</b>	
								Drawing-No. <b>ASS 3446A CO</b>	rev02
								Replace	SHEET

1

2

3

4

5

6

7