

1

2

3

4

5

6

7

A

A

B

B

C

C

D




D

E



E

F

F

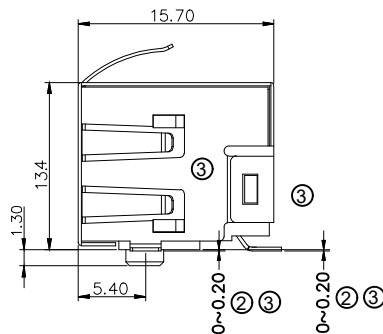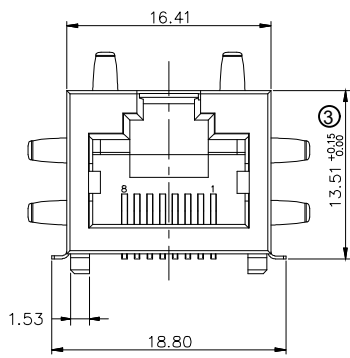

- NOTES:**
- ELECTRICAL:**
- ② 1. VOLTAGE RATING : 125 VAC.
 - 2. CURRENT RATING : 1.5 AMP.
 - 3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 - 4. INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500 VDC.
 - 5. DIELECTRIC STRENGTH : 750 VAC 60Hz, 1MIN.
 - 6. OPERATING : 750 CYCLES MIN.
- MECHANICAL:**
- ③ 1. HOUSING MATERIAL : GLASS FILLED HIGH TEMP. UL94V-0.
 - 2. SHIELD MATERIAL : C2680H PLATING NICKEL 30~80u" FOR ALL.
 - ③ 3. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.30 mm. UNDER PLATING: NICKEL PLATING 30~80u" OVER ALL.
- 4. PLATING : 6u" GOLD PLATING OVER NICKEL.
 - 5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
 - 6. PCB RETENTION POST-SOLDER : 10 LBS MIN.
- ENVIRONMENTAL:**
- 1. STORAGE : -40°C TO +85°C.
 - 2. OPERATION: -40°C TO +85°C.
 - 3. IR REFLOW SOLDERING TEMPERATURE: 255°C TO 265°C (5~10 SECONDS)
 - 4. PACKING: TAPE AND REEL

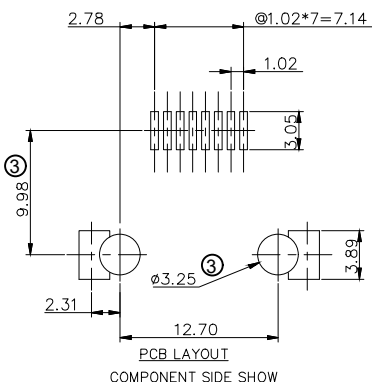

G

G

H

H

RoHS compliant

Unit:mm

Scale	Free						Date	Name	Description: Modular Connector		
	TOLERANCE										Drawn
X.X	±0.20						Approved	16.10.2023	Segal	ASSMANN WSW-No.	
X.XX	±0.15									AMJ-188-0011100R	
X.XXX	±0.10	③	Modify drawing	16.10.2023	Segal						
DIM	TOL	②	Modify drawing	13.04.2010	Dean				Drawing-No.	ASS 3473A CO	rev03
X.°	±5°	①	Drawn	21.12.2009	Dean				Customer-No.		SHEET 1 / 1
Angle	TOL	Id.	Modification	Date	Name		A company of				

1

2

3

4

5

6

7