


1	2	3	4	5	6	7
---	---	---	---	---	---	---

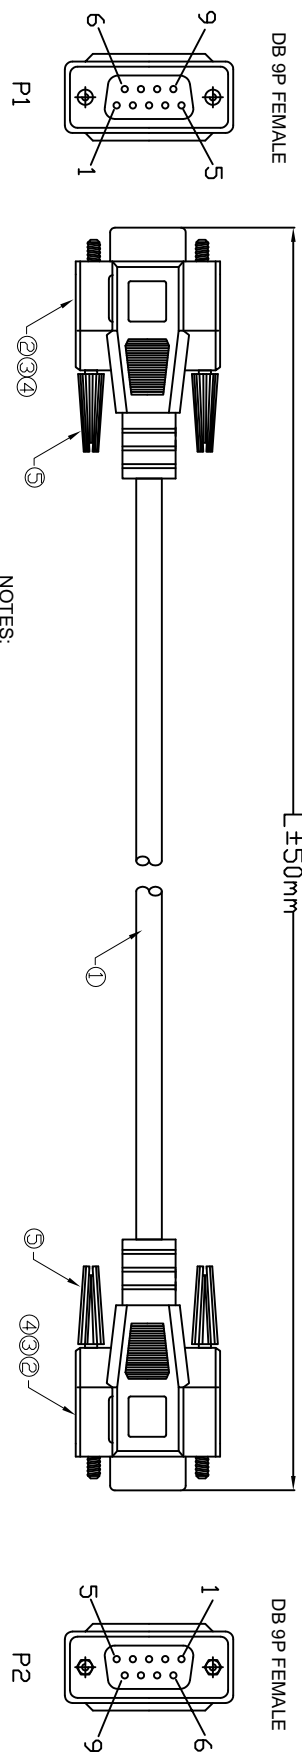

- NOTES:
- 1.CABLE: NON-UL 28AWG \*9C+D+ALUMV OD:5.0±0.20mm JACKET COLOR: BEIGE
  - 2.CONNECTOR:
  - 3.HOOD: MOLDED TYPE,PVC 45P,COLOR:BEIGE
  - 4.INSIDE MOLDING: TRANSPARENT PE
  - 5.THUMB SCREW: #4-40 UNC, MOLDED TYPE,PVC 45P,COLOR:BEIGE
- 6.ELECTRICLE TEST:
- (1)100% OPEN SHORT & MIS WIRE TEST.
  - (2)CONTACT RESISTANCE 3 ohm Max .
  - (3)INSULATION RESISTANCE 10M ohm Min .
  - (4)HI-POT TEST:DC 300V/10ms

PIN Assignment	
P1	P2
1 _____	1 _____
2 _____	2 _____
3 _____	3 _____
4 _____	4 _____
5 _____	5 _____
6 _____	6 _____
7 _____	7 _____
8 _____	8 _____
9 _____	9 _____
Shell _____	Drain _____
Shell _____	Shell _____

AK-610106-020-E	replace AK 182
AK-610106-030-E	replace AK 182 3M
AK-610106-050-E	replace AK 182 5M
AK 152 2M	OBSOLETE
AK 153 5M	OBSOLETE

ASSMANN WSW PIN	LENGTH
AK-610106-020-E	2.0 M
AK-610106-030-E	3.0 M
AK-610106-050-E	5.0 M

Scale	FREE								
TOLERANCE									
X.	±X								
X.X	±X								
X.XX	±X								
DIM	TOL								
X. °	±X°								
X.X°	±X°								
Angle	TOL								

②	Update drawing	17.06.2014	Joanna		
①	Drawn	01.07.2009	Rale		

Date	Name		
01.07.2009	Rale		
17.06.2014	Joanna		

Drawn	01.07.2009	Rale
Approved	17.06.2014	Joanna

Customer-No.	
ASSMANN WSW-No.	AK-610106-xxx-E
Drawing-No.	ASS 3620 CA
Replace	rev02

**ROHS compliant**  
Unit:mm

1	2	3	4	5	6	7
---	---	---	---	---	---	---