


| | | | | | | |
|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
|---|---|---|---|---|---|---|

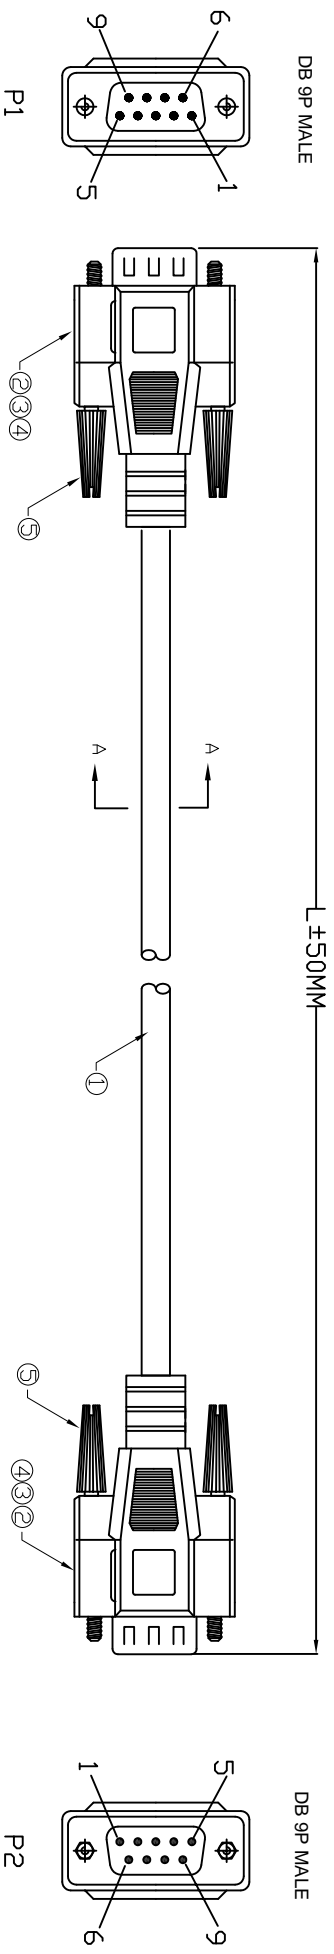

NOTES:
 1.CABLE: NON-LUL 28AWG(7/0.125TC)*9C+D(7/0.12TC)+ALMY OD:5.0±0.20mm JACKET COLOR: BEIGE
 2.CONNECTOR:
 P1&P2: DB 9P/M,SOLDER,BLUE INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL
 3.HOOD: MOLDED TYPE,PVC 45P,COLOR:BEIGE
 4.INSIDE MOLDING: TRANSPARENT PE.
 5.THUMB SCREW: #4-40 UNC, MOLDED TYPE,PVC 45P,COLOR:BEIGE
 6.ELECTRICLE TEST:

- (1) 100% OPEN SHORT & MIS WIRE TEST.
- (2) CONTACT RESISTANCE 3 ohm Max.
- (3) INSULATION RESISTANCE 10M ohm Min.
- (4) HI-POT TEST:DC 300V/10ms

| PIN Assignment | |
|----------------|-------|
| P1 | P2 |
| 1 | 1 |
| 2 | 2 |
| 3 | 3 |
| 4 | 4 |
| 5 | 5 |
| 6 | 6 |
| 7 | 7 |
| 8 | 8 |
| 9 | 9 |
| Shell | Drain |
| | Shell |

| | |
|-----------------|--------|
| ASSMANN WSW PIN | LENGTH |
| AK-610107-020-E | 2.0 M |
| AK-610107-030-E | 3.0 M |

| | | | | | | | | | | | |
|-------|-----------|-----|----------------|------------|--------|--|--|--|--|--|--|
| Scale | FREE | | | | | | | | | | |
| | TOLERANCE | | | | | | | | | | |
| X. | ±X | | | | | | | | | | |
| X.X | ±X | | | | | | | | | | |
| X.XX | ±X | | | | | | | | | | |
| DIM | TOL | | | | | | | | | | |
| X.° | ±X° | ② | Update drawing | 17.06.2014 | Joanna | | | | | | |
| X.X° | ±X° | ① | Drawn | 01.07.2009 | Rale | | | | | | |
| Angle | TOL | Id. | Modification | Date | Name | | | | | | |

ROHS compliant
 Unit:mm

| | | | | | | |
|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
|---|---|---|---|---|---|---|



| | |
|-----------------|-----------------|
| Customer-No. | |
| ASSMANN WSW-No. | AK-610107-xxx-E |
| Drawing-No. | |
| ASS 3621 CA | rev02 |
| Replace | Sheet |