

1

2

3

4

5

6

7

A

B

C

D

E

F

G

H

A

B

C

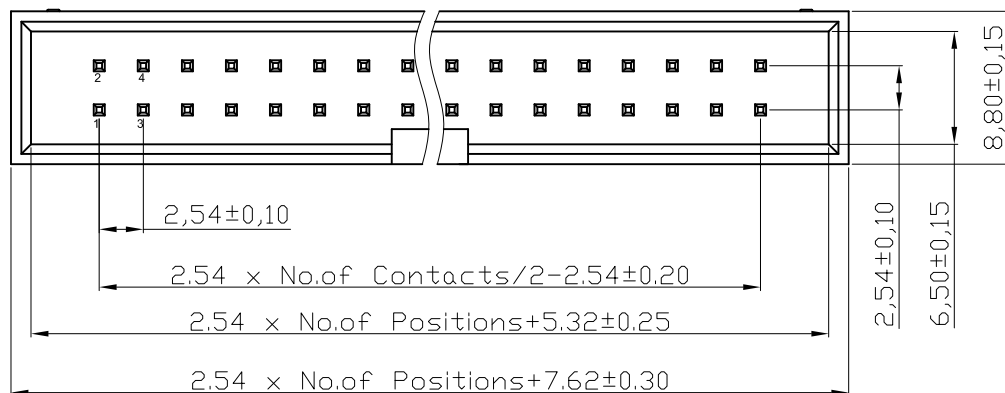
D

E

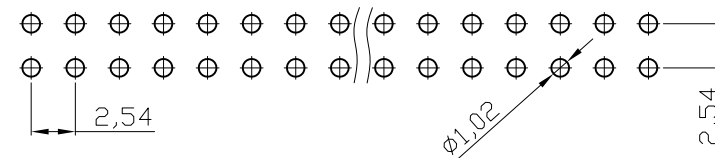
F

G

H



Recommended P.C.B Layout (Top Side)  
(PCB BOARD TOLERANCE  $\pm 0,05$ )

**NOTES:****MATERIAL**

1. Insulator Material: PBT+30%GF(UL94V-0), Grey
2. Contact Material : Brass
3. Contact Plating : Tin Over Ni

**ELECTRICAL**


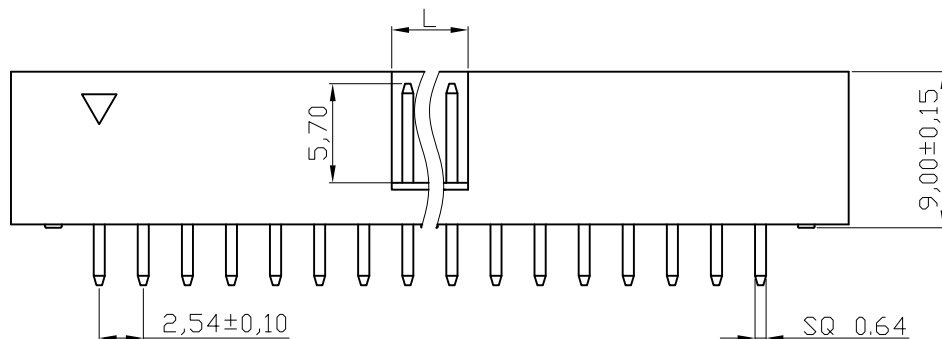
1. Current Rating : 3AMP
2. Withstand Voltage : 500V AC/Minute
3. Contact Resistance : 20m $\Omega$  max
4. Insulation Resistance : 1000M $\Omega$  min

**ENVIRONMENTAL**

1. Operation Temperature: -40°C to +105°C
2. Packing : Tray packing

**Order information:**

xx : 06,08,10,12,14,16,18,20,24  
26,30,34,40,50,60,64

**Dimension antitheses list**

NO. Pin	L
6P-8P	4.00
10P-64P	4.40

**RoHS compliant**

Scale	1:1	Date	29.12.2009	Name	Dean	Customer-No.		
TOLERANCE		Drawn	29.12.2009	Dean				
X.X	$\pm 0,40$	Approved	29.12.2009	Hellwig				
X.XX	$\pm 0,25$							
X.XXX	$\pm 0,15$							
DIM	TOL							
Angle	$\pm 3^\circ$							
		① Drawn	29.12.2009	Dean				
		Id.	Modification	Date	Name			

**ASSMANN**  
WSW components

Customer-No.

ASSMANN WSW-No.

**AWHW xxG-0502-T**

Drawing-No.

**ASS 4009 CO**

rev01

Replace

Sheet

1

2

3

4

5

6

7