
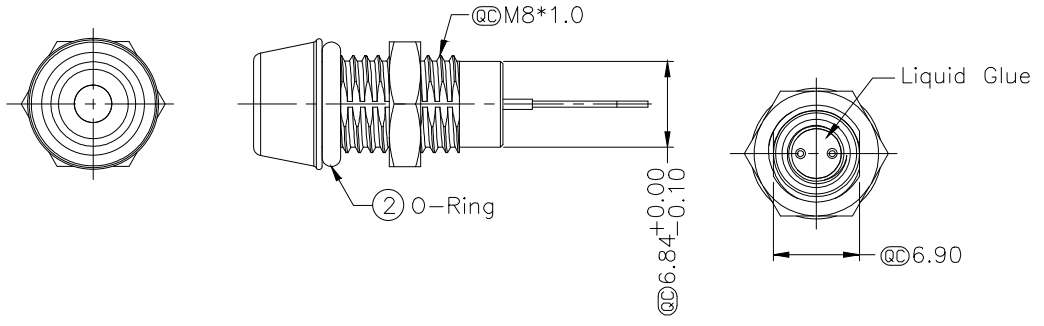
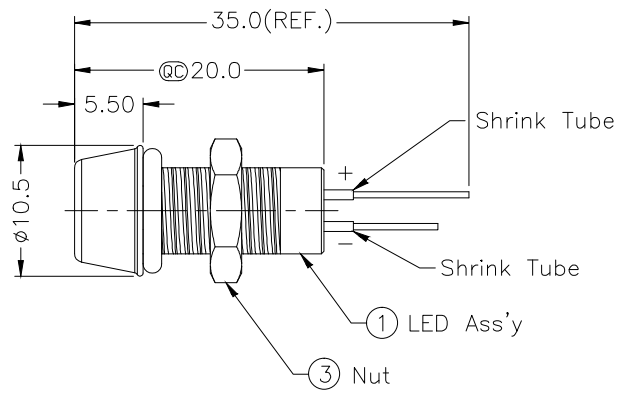


Recommended Panel Cut-Out

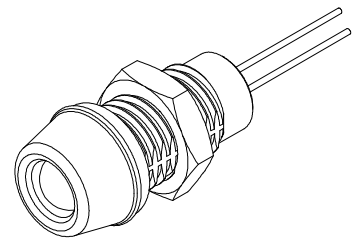

Notes:  
 @@Important Dimension To Check  
 Waterproof Rate: IP67  
 LED Holder: Brass, Nickel Plating  
 LED Spec:  
 ①  $\phi$ 5mm, Red LED  
 Lens Color: Water Clear  
 ① Forward Voltage: Red Typ. 2.2V/Max. 2.4(V)  
 ① Forward Current: Red Max. 30mA  
 ① Luminous Intensity: Typ. 5000(Mcd)  
 Reverse Voltage: DC 5V  
 Operating Temperature:  $-40\sim+80^{\circ}\text{C}$   
 O-Ring: EPDM, Black  
 Screw Nut: Brass, Nickel Plating  
 For Panel Thickness 6.5 max.

**RoHS compliant**

Scale	Free					Date	Name	Customer-No.
TOLERANCE						Drawn	11.03.2014	Winnie
.X	$\pm 0.25$					Approved	06.08.2021	Segal
.XX	$\pm 0.10$							ASSMANN WSW-No. A-LED8-1RBAS-MR7-1
.XXX	$\pm 0.05$							Drawing-No.
Angle	$\pm 1^{\circ}$	①	Update the notes	06.08.2021	Segal			ASS 6233 CO
		②	Drawn	11.03.2014	Winnie			rev01
		Id.	Modification	Date	Name			Replace