




Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)



3D VIEW(REF.)
SCALE 1:2

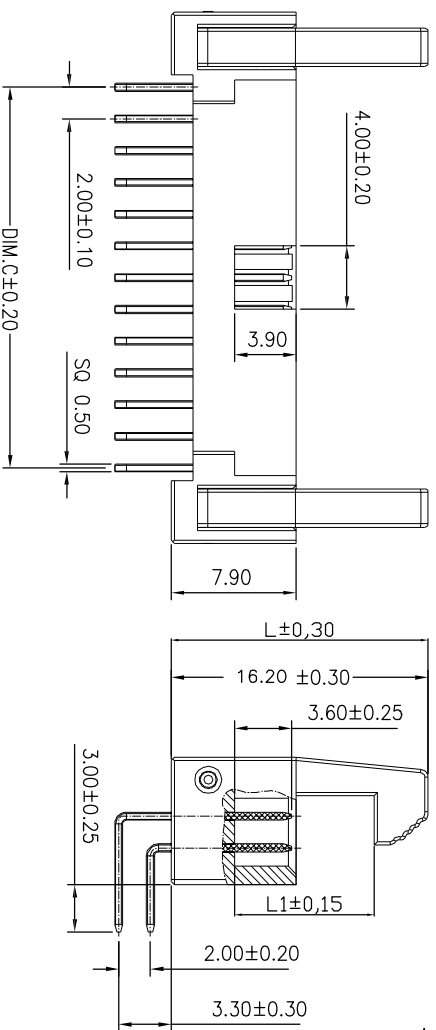

DIM	Long Latch	Short Latch
L	19.00	16.20
L1	11.80	8.80

No. Of POSITION	DIM.A	DIM.B	DIM.C
10	17.50	15.50	8.00
12	19.50	17.50	10.00
14	21.50	19.50	12.00
16	23.50	21.50	14.00
20	27.50	25.50	18.00
22	29.50	27.50	20.00
24	31.50	29.50	22.00
26	33.50	31.50	24.00
30	37.50	35.50	28.00
34	41.50	39.50	32.00
40	47.50	45.50	38.00
44	51.50	49.50	42.00
48	55.50	53.50	46.00
50	57.50	55.50	48.00
68	75.50	73.50	66.00

RoHS compliant

Scale	Free
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
DIM	TOL
X°	±3°
X.X°	±X°
Angle	TOL

Id.	Modification	Date	Name
①	Update the P/N & the latch on the drawing	25.01.2018	Winnie
②	Drawn	09.02.2015	Winnie

Date	Name
09.02.2015	Winnie
25.01.2018	Winnie



Customer-No.	Drawing-No.	Replace
ASSMANN WSW-No. AWHW-200-xx-RP11 AWHW-200-xx-RP13	ASS 6747 CO	rev01

NOTES:

MATERIAL

1. Insulator Material: PA9T+30%GF(Ul94V-0)Black
 2. Latch Material: PA9T+30%GF(Ul94V-0)Black
 3. Contact Material : Brass
 3. Contact Plating : Gold Flash /Tin Over Ni
 4. Fixed Axle Material :Brass
 5. Fixed Axle Material :Nickel Plated ELECTRICAL
1. Current Rating : 1 AMP
 2. Withstand Voltage : 500V AC/DC
 3. Contact Resistance : 20mΩ max
 4. Insulation Resistance: 1000MΩ min ENVIRONMENTAL
1. Operation Temperature: -40°C to +105°C
 2. Packing: Tray
- Order Code:
 AWHW-200-xx-RP11 :Short Latch
 AWHW-200-xx-RP13 :Long Latch

1	2	3	4	5	6	7
H	G	F	E	D	C	B