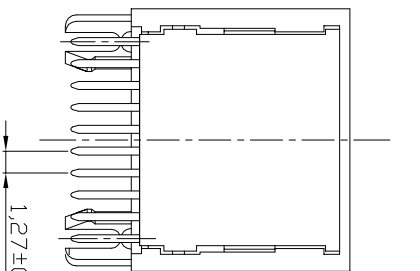
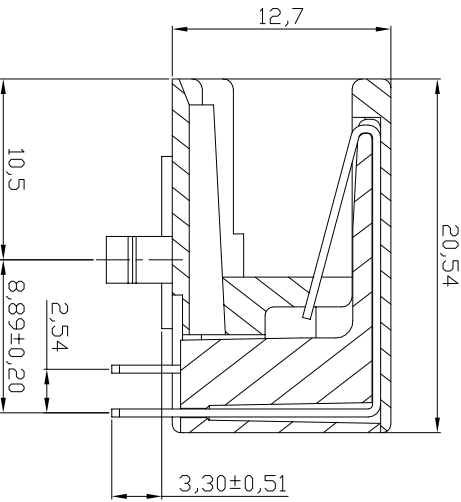
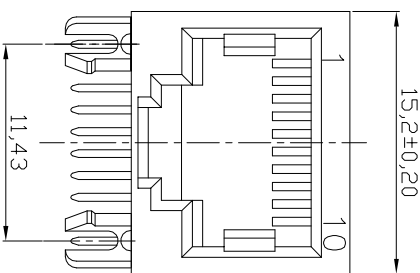
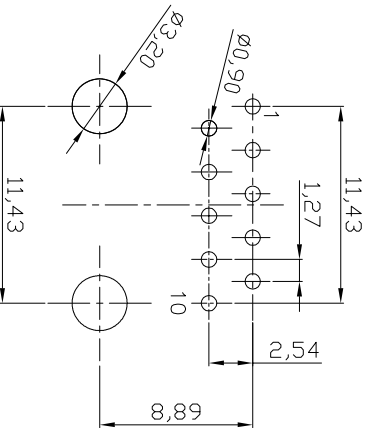
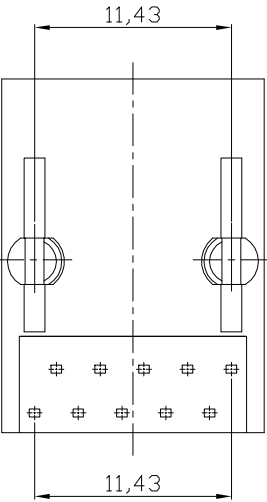



	1	2	3	4	5	6	7																																																																																	
A	<div></div> <div><p>Notes:</p><p>Electrical:</p><ol style="list-style-type: none">Voltage Rating: 125VACCurrent Rating: 1,5AMPContact Resistance: 50mΩ max.Insulation Resistance: 1000MΩ min. @ 500VDCDielectric Strength: 1000VAC 60Hz, 1 min.Operating: 750 cycles min.<p>Mechanical:</p><ol style="list-style-type: none">Housing Material: High Temp. UL94V-0 BlackInsert Material: High Temp. UL94V-0 BlackContact Material: PhosPhor Bronze t=0,35mmContact Plating: 6u" Gold on contact area 100~200u" Tin on solder area All over 30~50u" NickelPCB Retention Pre-solder: 1 LB min.PCB Retention Post-solder: 10 LBS min.<p>Environmental:</p><ol style="list-style-type: none">Storage: -40°C to +85°COperation: -40°C to +85°CWave Soldering Temperature: 255~265°C (5~10 seconds)<p>Package: Tray</p></div>																																																																																							
D	<div></div>																																																																																							
E																																																																																								
F																																																																																								
G	<div><p>RoHS compliant</p><p>Unit: mm</p><table><tr><th>Scale</th><th>Free</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>.X</td><td>±0.20</td><td></td><td></td><td></td><td>Drawn</td><td>08.09.2015</td><td>Amy</td></tr><tr><td>.XX</td><td>±0.15</td><td></td><td></td><td></td><td>Approved</td><td>08.09.2015</td><td>Amy</td></tr><tr><td>.XXX</td><td>±0.10</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Angle</td><td>±5°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>Ⓒ Drawn</td><td>08.09.2015</td><td>Amy</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>Id.</td><td>Modification</td><td>Date</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>Name</td></tr></table><div><p>ASSMANN components</p></div><div><p>Customer-No.</p><p>ASSMANN WSW-No.</p><p>AMJH-10-T-R-P1</p><p>Drawing-No.</p><p>ASS 6968 CO</p><p>rev00</p><p>Replace</p><p>Sheet</p></div></div>							Scale	Free							TOLERANCE								.X	±0.20				Drawn	08.09.2015	Amy	.XX	±0.15				Approved	08.09.2015	Amy	.XXX	±0.10							DIM	TOL							Angle	±5°												Ⓒ Drawn	08.09.2015	Amy						Id.	Modification	Date								Name	
Scale	Free																																																																																							
TOLERANCE																																																																																								
.X	±0.20				Drawn	08.09.2015	Amy																																																																																	
.XX	±0.15				Approved	08.09.2015	Amy																																																																																	
.XXX	±0.10																																																																																							
DIM	TOL																																																																																							
Angle	±5°																																																																																							
					Ⓒ Drawn	08.09.2015	Amy																																																																																	
					Id.	Modification	Date																																																																																	
							Name																																																																																	
H																																																																																								
	1	2	3	4	5	6	7																																																																																	