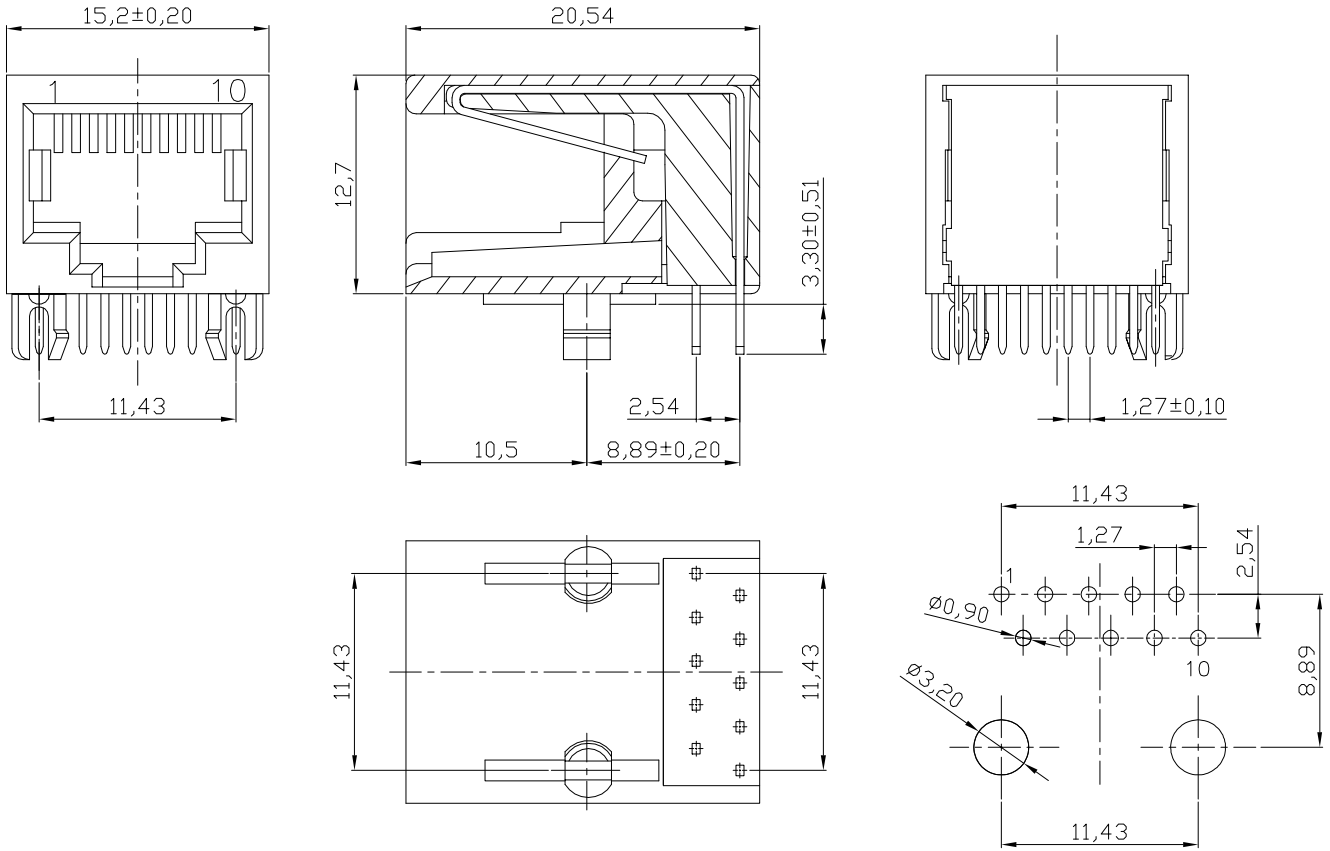

PC Board Layout
Component Side Show

Notes:

Electrical:
1. Voltage Rating: 125VAC
2. Current Rating: 1.5AMP
3. Contact Resistance: 50mΩ max.
4. Insulation Resistance: 1000MΩ min. @ 500VDC
5. Dielectric Strength: 1000VAC 60Hz,1 min.
6. Operating: 750 cycles min.

Mechanical:
1. Housing Material: High Temp. UL94V-0 Black
2. Insert Material: High Temp. UL94V-0 Black
3. Contact Material: PhosPhor Bronze t=0.35mm
4. Contact Plating: 50u" Gold on contact area
   100~200u" Tin on solder area
   All over 30~50u" Nickel
5. PCB Retention Pre-solder: 1 LB min.
6. PCB Retention Post-solder: 10 LBS min.

Environmental:
1. Storage: -40°C to +85°C
2. Operation: -40°C to +85°C
3. Wave Soldering Temperature: 255~265°C (5~10 seconds)

Package: Tray

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
.X	±0.20
.XX	±0.15
.XXX	±0.10
DIM	TOL
Angle	±5°

Id.	Modification	Date	Name
0	Drawn	08.09.2015	Amy

	Date	Name
Drawn	08.09.2015	Amy
Approved	08.09.2015	Amy

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
AMJH-10-T-R-P2

Drawing-No.
ASS 6969 CO

rev00

Replace

Sheet