


A
B
C
D
E
F
G
H

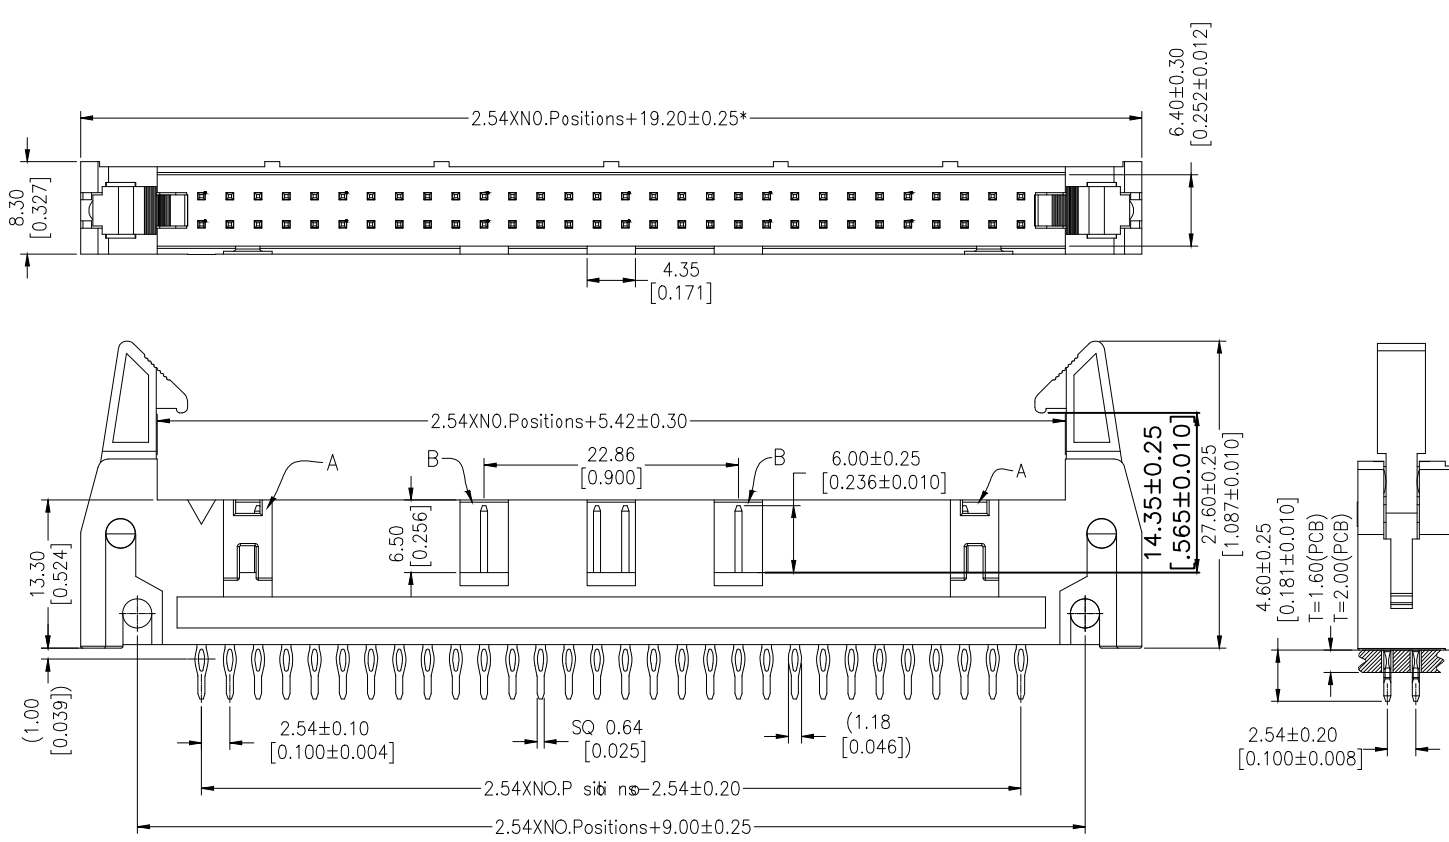


NOTES:
 Current Rating: 3AMP
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +105°C

Housing Material: PBT+30%GF, UL94V-0
 Latch Material: PBT+30%GF, UL94V-0
 Contact Material: Brass
 Contact Plating: Gold Flash/Tin

10P-18P Without Slot "A" and "B"
 20P-58P with Slot "A", Without Slot "B"
 60P-64P With Slot "A" and "B"

Packaging: AWHW-254-xx-PT2 Tube
 AWHW-254-xx-PP2 Tray ①

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05 T=1.6/2.0)

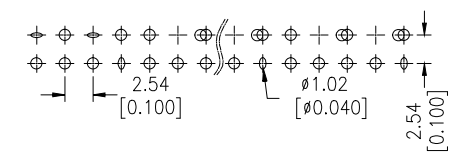

RoHS compliant

Unit:mm

Scale	1:1					Date	Name	Customer-No.
TOLERANCE						Drawn	22.09.2015	Ray
.X	±0.40					Approved	22.09.2015	Ray
.XX	±0.25							
.XXX	±0.15							
DIM	TOL	①	Add part "AWHW-254-xx-PP2 "	06.06.2019	Xavier			
Angle	±5°	②	Drawn	22.09.2015	Ray			
		Id.	Modification	Date	Name			

Customer-No.		
ASSMANN WSW-No.		
AWHW-254-xx-Px2		
Drawing-No.		
ASS 6994 CO	rev01	
Replace	Sheet	
	1/1	