


1 2 3 4 5 6 7

A

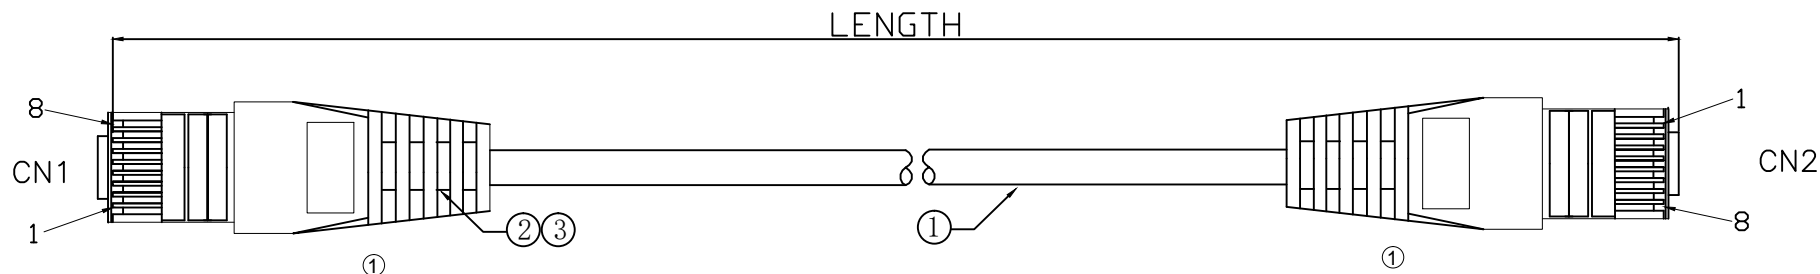


A

B

B

C

C

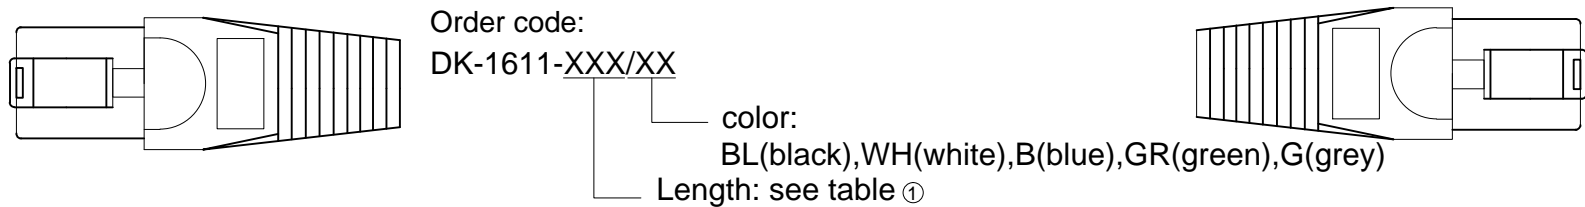


Order code:
DK-1611-XXX/XX


color:
BL(black),WH(white),B(blue),GR(green),G(grey)

Length: see table ①

PIN OUT

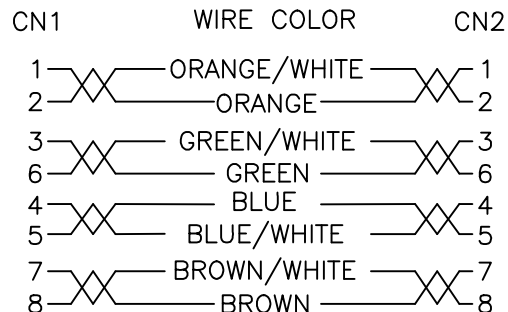

Length	Feet	mm	tolerance (mm)
001	1	305	+30.5/-15.3
003	3	914	+45.8/-36.6
005	5	1524	±45.8
007	7	2134	±64.1
010	10	3048	±91.5
015	15	4572	±137.3
020	20	6096	±183
025	25	7620	±228.8
050	50	15240	±457.5
100	100	30480	±915

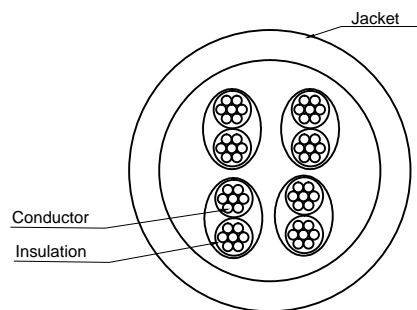

D

D

E

E

Electrical
Open/short/intermittence:100%
Dielectric strength: 2.5KV DC-2seconds.
The operating temperature: -20°C~+60°C

①		Molding PVC	2	Molding PVC 65P
①		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2
①		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.6±0.3mm
NO.	NAME.	Q'TY	SPECIFICATION	

F

F

G

G

RoHS compliant
Unit: mm

Scale	FREE	Date	Name	Customer-No.
TOLERANCE		Drawn	15.12.2015	Joanna
		Approved	12.04.2022	Luca
				ASSMANN WSW-No. DK-1611-XXX/X
DIM	TOL	Drawing-No.		ASS 7510 CA
		Replace		rev01
Angle	TOL	Sheet		
①	Change the plant	12.04.2022	Luca	
①	Drawn	15.12.2015	Joanna	
Id.	Modification	Date	Name	

H

H

1 2 3 4 5 6 7