
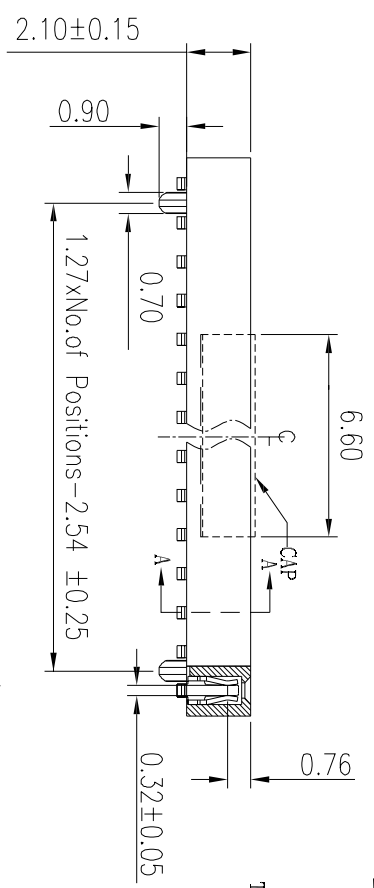


Notes:
 Rated current: 1.0AMP
 Contact resistance: 20mΩ max.
 Withstand voltage: 500V AC/DC
 Insulation resistance: 1000MΩ min.
 Operation temperature: -55°C to +105°C

Contact material: Phosphor Bronze, Gold Flash.
 Insulator material: PA9T+30%GF UL94V-0,Black
 Package: Tape&Reel+Cap

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

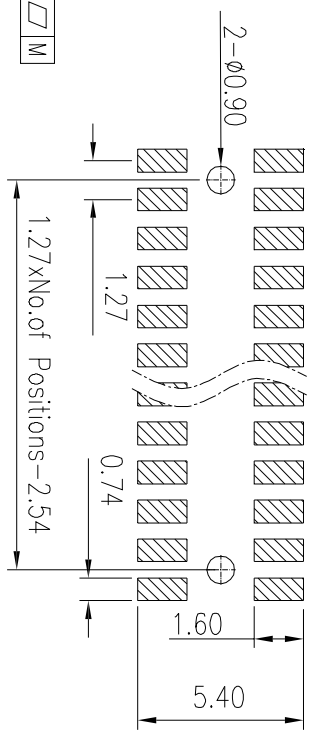

1~9P	M=0.10
10~19P	M=0.15
Diver20P	M=0.25

RoHS compliant
 Unit: mm

Scale	Free	Date	Name
TOLERANCE		Drawn	Winnie
X	±0.40	25.09.2017	Winnie
.XX	±0.25	Approved	Winnie
.XXX	±0.15		
DIM	TOL		
Angle	±5°		



Customer-No.	ASSMANN WSW-No.	Drawing-No.	Replace
	ABL-127-xx-SR14	ASS 7782 CO	rev00
			Sheet