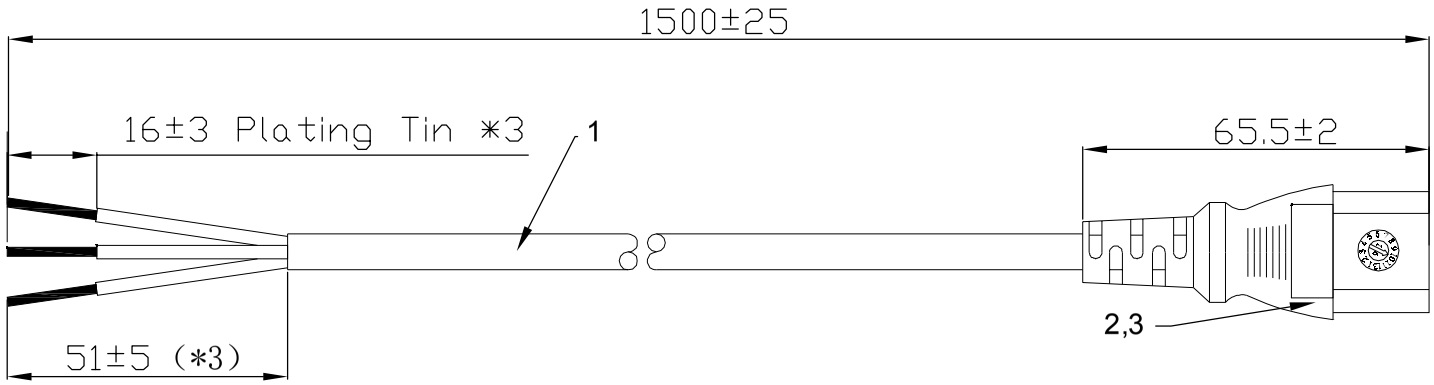



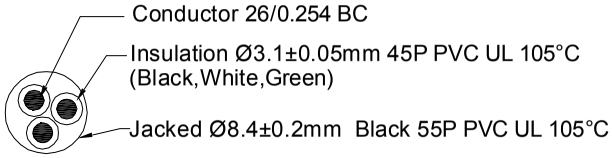

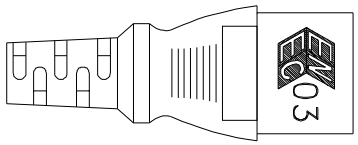

Cable Printing :CY86：Wire marking:
（UL）E218701 SJT 16AWGX3C 300V 105°C VW-1
C(UL) TYPE SJT 3*1.31mm²(16AWG) 300V 105°C E218701 FT2

Requirement:
1. Dielectric voltage:
between jacket and conductor 4200V/s
between conductors 2500V/s ; 0.5MA
2. Insulation resistance: 100MΩ
3. Continuity of lead 100% OK
① 4.Current Rating: 13A
① 5.Voltage Rating:125v

NO.	SPECIFICATION	Q'TY	Unit
③	Head+ terminal ,Color:White	1	EA
②	C13, Color:black PVC 55P	0.0245	Kg
①	SJT 16AWGX3C 105°C,Color:black L=1480mm	1	EA

RoHS compliant
Unit: mm

		Date	Name
Drawn		22.02.2017	Winnie
Approved		13.03.2017	Winnie

Id.	Modification	Date	Name
①	Add the current rating&voltage	13.03.2017	Winnie
⓪	Drawn	22.02.2017	Winnie

Scale	Free
TOLERANCE	
DIM	TOL
Angle	TOL

ASSMANN wsw components

Customer-No.

ASSMANN WSW-No.
A-PC0916-150027

Drawing-No.
ASS 7898 CA

rev01

Replace

Sheet

CAB0(