

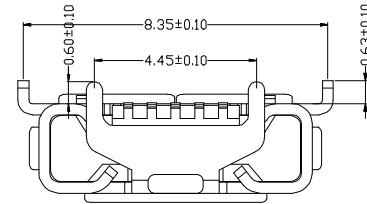

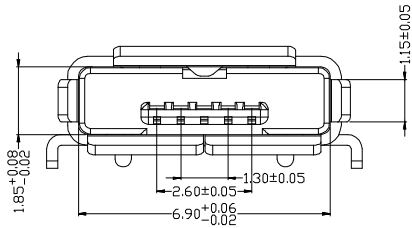
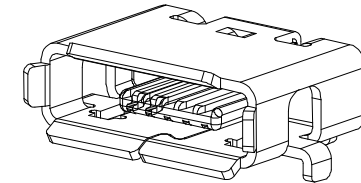




① **USB2.0 COMPLIANT**



- NOTES:  
 Mechanical:  
 1. Housing Material: High temperature , UL94V-0 , Black  
 2. Contact :Copper alloy,plating selective Gold flash/Tin  
 3. Shell:Copper Alloy & SUS301  
 Performance  
 ③ 1. Current Rating: 1.8A Max  
 ① 2. Dielectric strength: 200V AC for 1 minute  
 3. Contact Resistance: initial value 30mΩ Max.  
 4. Insulation Resistance: 100MΩ Min.  
 5. Dielectric withstanding voltage: 200V AC for 1 minute.  
 ② 6. Voltage Rating: 30VAC  
 7. Operation temperature: -30°C to +85°C  
 ② 8. Soldering temperature: 255±5°C for 3~5s  
 ② 9. Mating force: 3.57 kgf max.  
 ② 10. Unmating force: 1.0 kgf min.  
 ② 11.Durability: 10000 cycles min.  
 Package: Tape&Reel

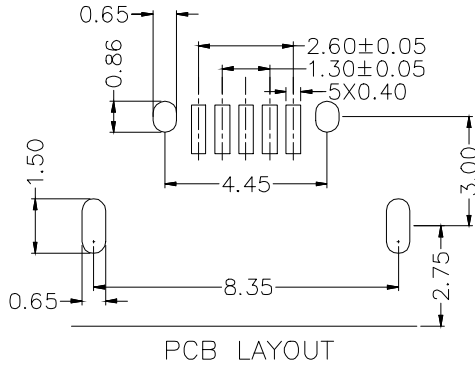

**RoHS compliant**  
 Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE					Drawn	17.04.2018	Tom	
0~6	±0.10	③	Update current rating	12.05.2020	Luca	Approved	12.05.2020	Luca
6~30	±0.15	②	Update	15.11.2019	Carson			
30~50	±0.20	①	Update	15.08.2019	Xavier			
50~100	±0.30	①	Update	15.08.2019	Xavier			
DIM	TOL	①	Update	15.08.2019	Xavier			
		①	Drawn	17.04.2018	Tom			
Angle	TOL	Id.	Modification	Date	Name			

ASSMANN WSW-No.  
**A-USB2-CFC-EA-GSR1**

Drawing-No.  
**ASS 7932 CO** rev03

Replace Sheet