



RECOMMEND
PANEL CUT-OUT

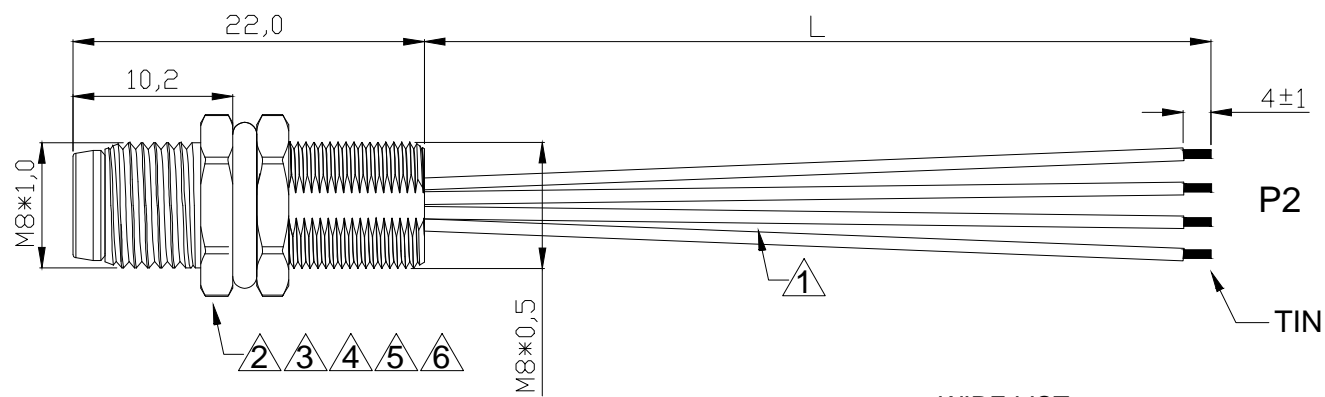

- Notes: ⑤
Detailed Product Description:
1. Waterproof connector rating is IP67
2. Protected from dust and water during immersion, resistant to many oils and chemical etc.
3. The product can not be used permanently under water per ISO-20653, IEC60529
Other Specification:
4. Rating voltage: 60V AC/DC
5. Rating current: 3A
6. Insulation resistance: >100MΩ.
7. Contact resistance of connector: ≤10mΩ.
8. Operating Temperature: -25°C ~ +80°C.
9. Mating cycle: >100 cycles.
10. Tightening torque: 0.4~1.6 NM
(According to IEC 61076-2-104)



② Order Code:
A-M08A04MSTxxx16BK00

- L: ⑤
020: 200mm ±15mm ③
050: 500mm ±20mm
100: 1000mm ±30mm
200: 2000mm ±40mm
300: 3000mm ±50mm
500: 5000mm ±70mm

WIRE LIST

P1	COLOR	P2
1	BROWN	S/T
2	WHITE	
3	BLUE	
4	BLACK	

ITEM	SPECIFICATION	Q'TY	UNIT
⑥	M8*0.5 BRASS PLATED NI NUT L*W=2.0*1.0mm	1	PCS
⑤	BLACK EPOXY RESIN	1	G
④	O-RING BLACK FKM Ø7.00*1.5mm	1	PCS
③	M8 NICKEL PLATED BRASS NUT REAR PANEL MOUNT MALE SHELL	1	PCS
②	M8 A CODING 4 PIN MALE CONNECTOR	1	SET
①	UL1007 24AWG HOOK UP WIRE VW-1	1	SET

G	RoHS compliant Unit: mm	Scale	Free	⑤	Update notes and length tolerance	22.01.2024	Luca		Date	Name	Description: Circular Cable	
		TOLERANCE		④	Add VW-1	19.12.2023	Winnie	Drawn	21.11.2018	Segal		
H		.X	±0.5	③	Add a new part for length 200mm	27.11.2023	Luca	Approved	22.01.2024	Luca	ASSMANN WSW-No. ① A-M08A04MSTxxx16BK00	
		.XX	±0.20	②	Add the order code	31.05.2023	Winnie				Drawing-No.	
		DIM	TOL	①	Update the P/N	26.01.2019	Segal	 A company of 			ASS 8412 CA	rev05
		X.	±2.0°	①	Drawn	21.11.2018	Segal				Customer-No.	Sheet
		.X	±1.0°	①								
		Angle	TOL	Id.	Modification	Date	Name					