


NOTES:

MATERIAL
 1.HousingMaterial : High Temp,UL94V-0,BK
 2.Contact Material : Phosphor bronze,t=0.35mm
 3.Contact Plating: 3u" Gold Over Ni

ELECTRICAL
 1.Current Rating : 1.5AMP max
 2.Rating Voltage : 125V AC
 3.Withstand Voltage : 1000V AC/minute
 4.Contact Resistance : 35mΩ max
 5.Insulation Resistance: 1000MΩ min

ENVIRONMENTAL
 1.Operation Temperature: -40°C to +85°C
 2.Storage Temperature: -40°C to +85°C
 3.Mechanical life cycle: 750 cycles min
 4.PCB retention post-solder force: 10LBS min
 5.Soldering Temperature: +260°C max

Mates with modular plug conforming to FCC part 68,subpart F.

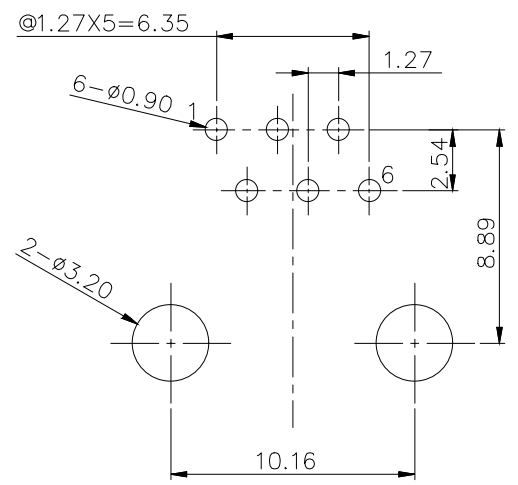

P.C.B Layout

RoHS compliant

Unit:mm

G	Scale	Free					Date	Name	Description:	Modular Jacks
	TOLERANCE					Drawn	23.10.2020	Daniel		Top-entry, THT
	.X	±0.20				Approved	23.10.2020	Daniel	ASSMANN WSW-No.	A-MJH-6-EG-GTP50
H	.XX	±0.15							Drawing-No.	ASS 8697 CO
	.XXX	±0.10							Customer-No.	SHEET 1 / 1
	DIM	TOL								
	X.°	± 5°	Ⓞ	Drawn	23.10.2020	Daniel				
Angle	TOL	Id.	Modification	Date	Name					