

1

2

3

4

5

6

7

A

A

NOTE:















- 1.MATERIAL:
- 1.1 Insulator: PPS
- 1.2 Terminal: Brass
- 1.3 Clamp: Riveted copper
- 1.4 Insulation clip: Brass
- 1.5 Locking sleeve: Riveted copper
- 1.6 Shell+tail cover: Brass



- 2.MECHANICAL
- 2.1 Durability: 4500 cycles min

- 3.Protection garde: IP50
- 4.Operating temperature: -50°C to +200°C

Order Code:A-CPPB-XX-MGMS-GHB04
 └── Number of Pins

Electrical character

Series	PIN Number (Solder)	TerminalØ	Test voltage(KV rms)		Rated current(A)
			Pin-Pin	Pin-Shell	
02		2.0	2.10	1.75	30.0
03		1.6	2.40	1.85	17.0
04		1.3	1.85	1.85	15.0
05		1.3	1.75	1.60	14.0
06		1.3	1.35	1.45	12.0
07		1.3	1.75	1.60	11.0
08		0.9	1.50	1.25	10.0
10		0.9	1.45	1.30	8.0
12		0.7	1.25	1.35	7.0
14		0.7	1.15	1.35	6.5
16		0.7	0.95	1.25	6.0
18		0.7	0.85	1.20	5.5
19		0.7	0.95	1.25	5.0
26		0.5	0.95	1.30	2.0

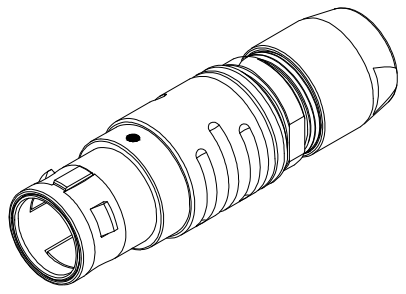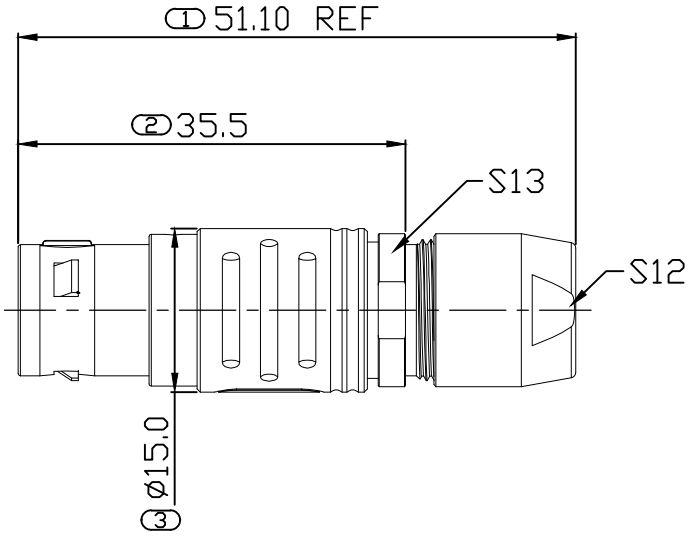

B

B

C

C

D

D

E

E

F

F

G

G

RoHS compliant
unit:mm

Scale	Free
TOLERANCE	
.X	±0.50
.XX	±0.20
DIM	TOL
X.°	±2.0°
.X°	±1.0°
Angle	TOL

①	Update dimension	04.03.2024	Luca
②	Drawn	15.09.2021	Peter
Id.	modification	Date	Name

Date: 15.09.2021
Name: Peter

Drawn: 15.09.2021
Approved: 04.03.2024
Name: Luca

ASSMANN
WSW components

Description: Circular Connector
Push Pull Self Lock / Male

ASSMANN WSW-NO.
A-CPPB-XX-MGMS-GHB04

Drawing-No. ASS 9036 CO rev01

Customer-No. SHEET 2 / 2

1

2

3

4

5

6

7