

1

2

3

4


5

6

7

A

A

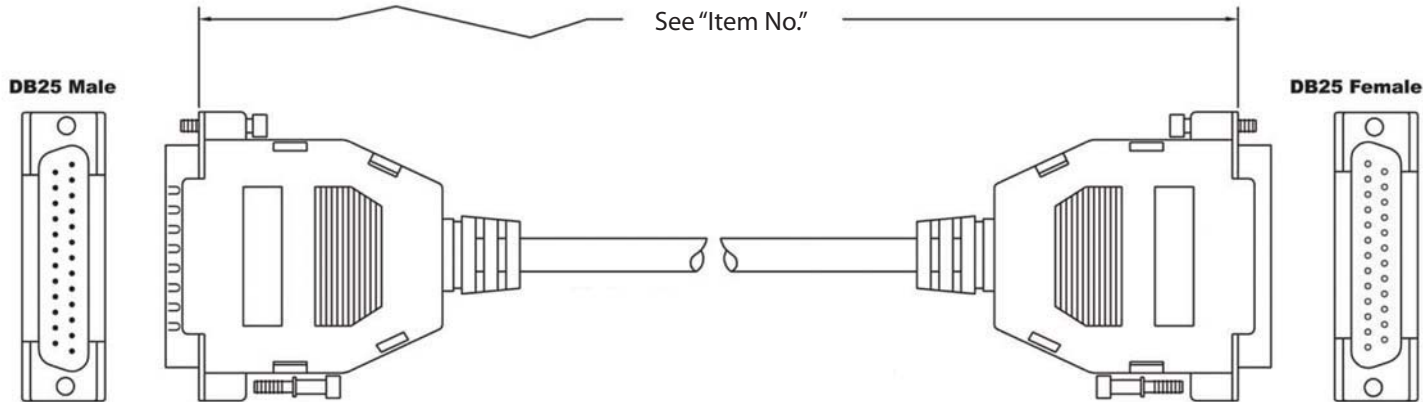

DB25 Male

DB25 Female

See "Item No."

B

B

C

C

Configuration:

DB25M	DB25F
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
Shield	Shield

Material:

- Cable: #28 25C+1+AL/MY O.D:7.0mm
- Both connectors with normal type
- Screw(Metal):#4-40UNC Type
- Assembly(Snap Hood) Type

Notes:

- Total Length: See "Item No."
- Color: Beige
- Assembly Type

D

D

E

E

F

F

G

G

Scale	1:1						Name	Item No. AK404-2-R (2 Meters) AK526-3-R (3 Meters) AK405-5-R (5 Meters)
TOLERANCE					Drawn	11.11.11	Chappell	
X.X	±0.40				Approved			Title Extension Cable for 25 Pin Interface, D-Sub 25 pin M to D-Sub 25 pin F, Serial / Parallel
X.XX	±0.25							
X.XXX	±0.15							Drawing No.
Angle	±3°							rev00
								Replace
								Sheet



H

H

1

2

3

4

5

6

7