Auf dem Schüffel 1
D-58513 Lüdenscheid
Tel.: +49-2351 - 554-0
Fax +49 (2351) 554-861
info@assmann-wsw.com
www.assmann-wsw.com

Product Change Notification(PCN)

Issue Date: 14.09.2018
Modification / Revision Date: 14.09.2018

A-Dx25-HOOD-WP
Waterproof connector

Change Notification: PCN 2018091408-A-Dx25-HOOD-WP

Description of changes:
Change of production plant
1. Change of tolerance
2. Change of dimension
3. Change of insulator material
4. Draw.-No. ASS_6257_COrev01 substitutes ASS_6257_COrev00
5. Draw.-No. ASS_6260_COrev01 substitutes ASS_6260_COrev00

Date of change and Implementation:
Change: Week 37 / year 2018
Implementation: 14.09.2018

Key Characteristics of Change: Material & Dimensions, see page 3

Products Affected:
A-DF25-HOOD-WP
A-DS25-HOOD-WP

Reason for Change: Change of production plant

Response : No response to this notification is required.

PCN Revision History:

Auf dem Schüffel 1
D-58513 Lüdenscheid
Tel.: +49-2351 - 554-0
Fax +49 (2351) 554-861
info@assmann-wsw.com
www.assmann-wsw.com

Product Change Notification(PCN)

Issue Date: 14.09.2018
Modification / Revision Date: 14.09.2018

Reference Documents / Attachments:

Document: Drawing

ASSMANN WSW P/N	Drawing Number
A-DF25-HOOD-WP	ASS_6257_COrev01
A-DS25-HOOD-WP	ASS_6260_COrev01

PCN Revision History:

Date of Revision: 14.09.2018 Revision Number: 00

Auf dem Schüffel 1
D-58513 Lüdenscheid
Tel.: +49-2351 - 554-0
Fax +49 (2351) 554-861
info@assmann-wsw.com
www.assmann-wsw.com

Product Change Notification(PCN)

Issue Date: 14.09.2018
Modification / Revision Date: 14.09.2018

Old version	New version
1.Dimension : (1)64.4mm 	1.Correct Dimension: (1)64.5mm 
1.No Dimensions on drawing :	1.Add dimensions (2)12.7mm (3)53.3mm (4)23.0mm  
connector in Tin plated 	connector in full gold plated 
Notes and no Electrical specification Note: * ①Important Dimension. * Waterproof Rate: IP67 * Connector:D-SUB 25Pin Female. * Sealing Nut:Nylon,Black. * Seals For Cable OD:ø6.0mm~ø10.0mm * One Set Unassembled in One PE Bag.	Update Notes and add Electrical specification NOTES: 1. Waterproof rate: IP67 2. Gasket: EPDM Black UL94V-0① 3. Housing: ABS Black UL94V-0① 4. Screw: Brass 5. O-ring: Silicone Clear UL94V-0① 6. Body: Nylon Black UL94V-0① 7. Sealing Nut: Nylon Black UL94V-0① 8. Connector: D-Sub 25Pin Female, pin in full gold plated ① 9. Seals for Cable OD:ø6.0mm-ø10.0mm 10. One Set Unassembled in One Zipper Bag ① Electrical 1.Contact resistance: 20mΩ max. 2.Insulation resistance: 500MΩ min. at DC500V 3.Dielectric withstanding voltage: 500V AC 1 minute 4.Rating current: 2A 5.Durability: 500 cycles 6.Temperature range: -20°C ~ +85°C
For detail, please take attached new drawing for reference:	ASS_6257_C0rev01 ASS_6260_C0rev01

PCN Revision History:

Date of Revision: 14.09.2018 Revision Number: 00

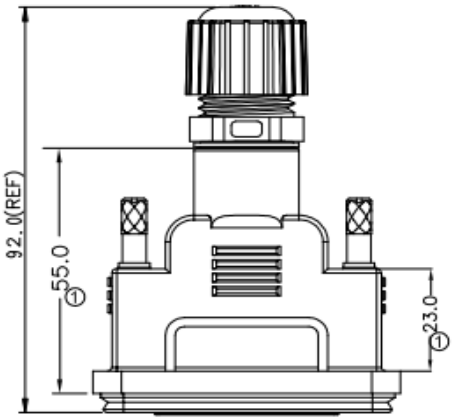

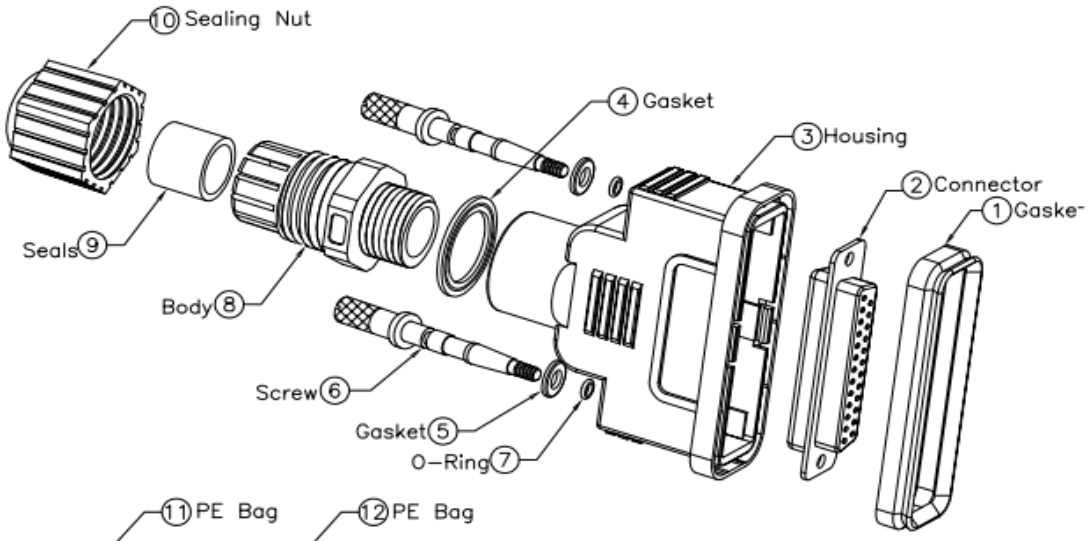

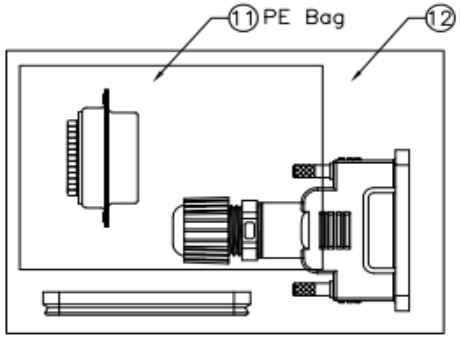

NOTES:
1. Waterproof rate: IP67
2. Gasket: EPDM Black UL94V-0①
3. Housing: ABS Black UL94V-0①
4. Screw: Brass
5. O-ring: Silicone Clear UL94V-0①
6. Body: Nylon Black UL94V-0①
7. Sealing Nut: Nylon Black UL94V-0①
8. Connector: D-Sub 25Pin Female, pin in full gold plated ①
9. Seals for Cable OD:φ6.0mm-φ10.0mm
10. One Set Unassembled in One Zipper Bag

① Electrical
1. Contact resistance: 20mΩ max.
2. Insulation resistance: 500MΩ min. at DC500V
3. Dielectric withstanding voltage: 500V AC 1 minute
4. Rating current: 2A
5. Durability: 500 cycles
6. Temperature range: -20°C ~ +85°C

RoHS compliant
Unit: mm

Scale	Free						Date	Name	Customer-No.
TOLERANCE						Drawn	22.04.2014	Joanna	
						Approved	03.04.2018	Amy	ASSMANN WSW-No. A-DF25-HOOD-WP
UNIT	±0.5								
DIM	TOL	①	Correct dimensions and add notes	03.04.2018	Segal	ASSMANN WSW components			Drawing-No. ASS 6257 CO rev01
		⓪	Drawn	22.04.2014	Joanna				
Angle	TOL	Id.	Modification	Date	Name				Replace / Sheet

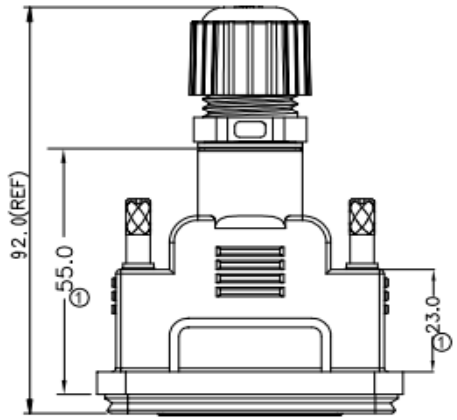

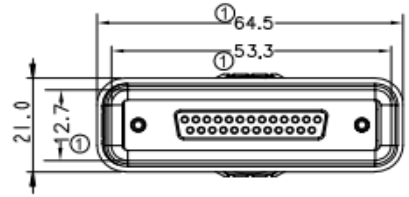

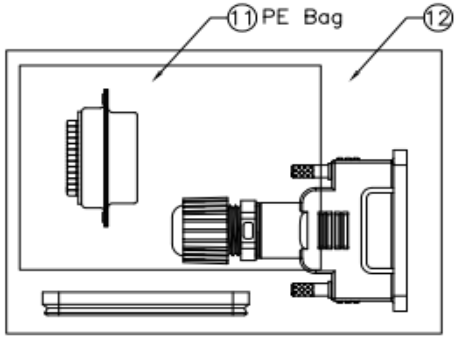

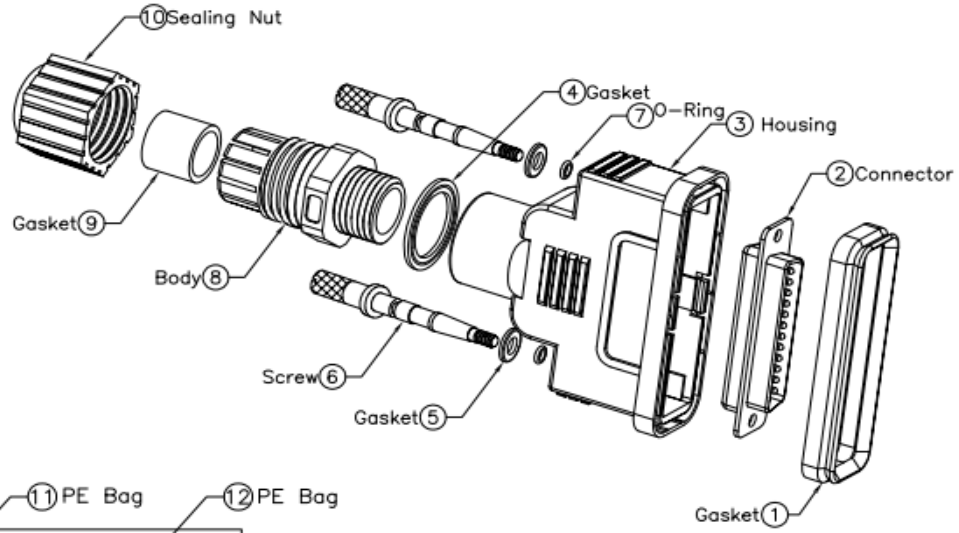

NOTES:
1. Waterproof rate: IP67
2. Gasket: EPDM Black UL94V-0①
3. Housing: ABS Black UL94V-0①
4. Screw: Brass
5. O-ring: Silicone Clear UL94V-0①
6. Body: Nylon Black UL94V-0①
7. Sealing Nut: Nylon Black UL94V-0①
8. Connector: D-Sub 25Pin Male, pin in full gold plated①
9. Seals for Cable OD:φ6.0mm-φ10.0mm
10. One Set Unassembled in One Zipper Bag

① Electrical
1. Contact resistance: 20mΩ max.
2. Insulation resistance: 500MΩ min. at DC500V
3. Dielectric withstanding voltage: 500V AC 1 minute
4. Rating current: 2A
5. Durability: 500 cycles
6. Temperature range: -20°C ~ +85°C

RoHS compliant
Unit: mm

Scale	Free							Date	Name
TOLERANCE							Drawn	22.04.2014	Joanna
							Approved	03.04.2018	Amy
UNIT	±0.5								
DIM	TOL	①	Correct dimensions and add notes	03.04.2018	Segal				
		⓪	Drawn	22.04.2014	Joanna				
Angle	TOL	Id.	Modification	Date	Name				

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No. A-DS25-HOOD-WP

Drawing-No. ASS 6260 CO rev01

Replace | Sheet