



## PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 20.04.2022  
MODIFICATION / REVISION DATE: 20.04.2022

### AKSG-200/x Jumper Connector

CHANGE NOTIFICATION: PCN\_20220420\_AKSG200X

DESCRIPTION OF CHANGES: CHANGE OF PRODUCT LOCATION  
CHANGE OF DATA SHEET  
New Draw.-No.ASS\_0243\_COrev04

REASON FOR CHANGE: CHANGE OF PRODUCT LOCATION  
CHANGE OF PRODUCT DIMENSIONS, TOLERANCES AND/OR PROPERTIES

KEY CHARACTERISTICS OF CHANGE: Details see page 3

PRODUCTS AFFECTED: AKSG-200/x

DATE OF CHANGE AND IMPLEMENTATION: CHANGE: WEEK 17 / YEAR 2022  
IMPLEMENTATION: 2022-04-20

RESPONSE: NO RESPONSE TO THIS NOTIFICATION IS REQUIRED





Auf dem Schüffel 1  
D-58513 Lüdenscheld  
Tel.: +49-2351 - 554-200  
Fax +49 (2351) 554-861  
info@assmann-wsw.com  
www.assmann-wsw.com

## PRODUCT CHANGE NOTIFICATION (PCN)


ISSUE DATE: 20.04.2022  
MODIFICATION / REVISION DATE: 20.04.2022

AKSG-200/x OLD VERSION	AKSG-200/G NEW VERSION																																				
<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Scale</th> <th>Free</th> </tr> </thead> <tbody> <tr> <td colspan="2" style="text-align: center;">TOLERANCE</td> </tr> <tr> <td>.X</td> <td>±0.38</td> </tr> <tr> <td>.XX</td> <td>±0.25</td> </tr> <tr> <td>.XXX</td> <td>±0.13</td> </tr> <tr> <td>DIM</td> <td>TOL</td> </tr> <tr> <td>X.°</td> <td>±1°</td> </tr> <tr> <td>Angle</td> <td>TOL</td> </tr> <tr> <td>UNIT</td> <td>mm</td> </tr> </tbody> </table> <p><b>NOTES:</b></p> <ol style="list-style-type: none"> <li>1. Insulation: Glass Filled PBT, UL94V-0, Color Black</li> <li>2. Contact : Brass</li> <li>3. Current Rating: 3A Max</li> <li>4. Dielectric Voltage: 1000V rms / 1 minute</li> <li>5. Insulation Resistance: 1000M ohm Min.</li> <li>6. Contact Resistance: 30m ohm Max.</li> <li>7. Operating and Storage Temperature: -40°C ~ +105°C</li> <li>8. Mating Cycles: 10 Min.</li> </ol> <p style="text-align: center;">AKSG-200/x</p> <p style="text-align: center;">Contact Area Plating: ③  G: Gold Flash  Z: Tinned</p>	Scale	Free	TOLERANCE		.X	±0.38	.XX	±0.25	.XXX	±0.13	DIM	TOL	X.°	±1°	Angle	TOL	UNIT	mm	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Scale</th> <th>Free</th> </tr> </thead> <tbody> <tr> <td colspan="2" style="text-align: center;">TOLERANCE</td> </tr> <tr> <td>.X</td> <td>±0.38</td> </tr> <tr> <td>.XX</td> <td>±0.25</td> </tr> <tr> <td>.XXX</td> <td>±0.15</td> </tr> <tr> <td>DIM</td> <td>TOL</td> </tr> <tr> <td>X.°</td> <td>±1°</td> </tr> <tr> <td>Angle</td> <td>TOL</td> </tr> <tr> <td>UNIT</td> <td>mm</td> </tr> </tbody> </table> <p><b>NOTES:</b></p> <ol style="list-style-type: none"> <li>1. Insulation: Glass Filled PBT, UL94V-0, Color Black</li> <li>2. Contact : Brass</li> <li>3. Current Rating: 1.5 A Max</li> <li>4. Dielectric Voltage: 1000V rms / 1 minute</li> <li>5. Insulation Resistance: 1000M ohm Min.</li> <li>6. Contact Resistance: 30m ohm Max.</li> <li>7. Operating and Storage Temperature: -40°C ~ +105°C</li> <li>8. Mating Cycles: 10 Min.</li> </ol> <p style="text-align: center;">AKSG-200/x</p> <p style="text-align: center;">Contact Area Plating: ③  G: Gold Flash  Z: Tinned</p>	Scale	Free	TOLERANCE		.X	±0.38	.XX	±0.25	.XXX	±0.15	DIM	TOL	X.°	±1°	Angle	TOL	UNIT	mm
Scale	Free																																				
TOLERANCE																																					
.X	±0.38																																				
.XX	±0.25																																				
.XXX	±0.13																																				
DIM	TOL																																				
X.°	±1°																																				
Angle	TOL																																				
UNIT	mm																																				
Scale	Free																																				
TOLERANCE																																					
.X	±0.38																																				
.XX	±0.25																																				
.XXX	±0.15																																				
DIM	TOL																																				
X.°	±1°																																				
Angle	TOL																																				
UNIT	mm																																				
FOR DETAIL, PLEASE TAKE ATTACHED NEW DRAWING: FOR REFERENCE																																					

**PCN REVISION HISTORY:**

DATE OF REVISION: 20.04.2022

REVISION NUMBER: 00

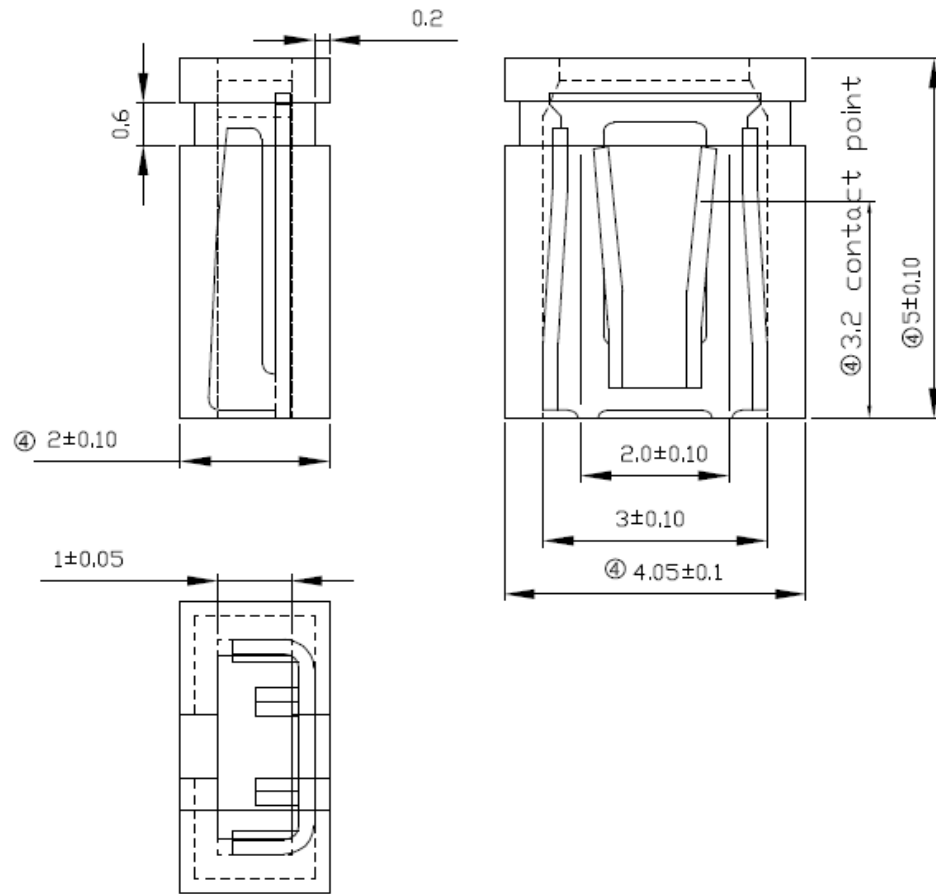

**NOTES:**

1. Insulation: Glass Filled PBT, UL94V-0, Color Black
2. Contact ; Brass
- ④ 3. Current Rating: 1.5 A Max
4. Dielectric Voltage: 1000V rms / 1 minute
5. Insulation Resistance: 1000M ohm Min.
6. Contact Resistance: 30m ohm Max.
7. Operating and Storage Temperature: -40°C ~ +105°C
- ③ 8. Mating Cycles: 10 Min.

AKSG-200/x

Contact Area Plating: ③  
G: Gold Flash

**RoHS compliant**  
Unit:mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE					Drawn	08.03.2005	Hellwig	
.X	±0.38							
.XX	±0.25	④	Change the plant	21.04.2022	Winnle	Approved	21.04.2022	Winnle
.XXX	±0.15	③	Update	07.06.2013	Winnle			
DIM	TOL	②	Update	27.07.2009	Rale			
X.°	±1°	①	Drawn	08.03.2005	Hellwig			
Angle	TOL							
UNIT	mm	Id.	Modification	Date	Name			

ASSMANN WSW-No. **AKSG-200/x**

Drawing-No. **ASS 0243 CO** rev04



Replace SHEET