Auf dem Schüffel 1
D-58513 Lüdenscheid
Tel.: +49-2351 - 5542-00
Fax +49 (2351) 554-861
info@assmann-wsw.com
www.assmann-wsw.com

PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 20.04.2022
MODIFICATION / REVISION DATE: 20.04.2022

AKSPTx xx
Jumper Connector

CHANGE NOTIFICATION:	PCN_20220420_AKSPTxxx
DESCRIPTION OF CHANGES:	CHANGE OF PRODUCT LOCATION CHANGE OF DATA SHEET New Draw.-No.ASS_0336_COrev05
REASON FOR CHANGE:	CHANGE OF PRODUCT LOCATION CHANGE OF PRODUCT DIMENSIONS, TOLERANCES AND/OR PROPERTIES
KEY CHARACTERISTICS OF CHANGE:	Details see page 3
PRODUCTS AFFECTED:	AKSPTx xx
DATE OF CHANGE AND IMPLEMENTATION:	CHANGE: WEEK 17 / YEAR 2022 IMPLEMENTATION: 2022-04-20
RESPONSE:	NO RESPONSE TO THIS NOTIFICATION IS REQUIRED

PCN REVISION HISTORY:
DATE OF REVISION: 20.04.2022 REVISION NUMBER: 00

Auf dem Schüffel 1
D-58513 Lüdenscheid
Tel.: +49-2351 - 554-200
Fax +49 (2351) 554-861
info@assmann-wsw.com
www.assmann-wsw.com

PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 20.04.2022
MODIFICATION / REVISION DATE: 20.04.2022

REFERENCE DOCUMENTS / ATTACHMENTS:
DOCUMENT: DRAWING

ASSMANN WSW P/N	Drawing Number		ASSMANN WSW P/N	Drawing Number
AKSPTG xx	ASS_0336_COrev04	↔	AKSPTx xx	ASS_0336_COrev05
AKSPTZ xx	ASS_0336_COrev04	↔	Discontinue	Discontinue

PCN REVISION HISTORY:
DATE OF REVISION: 20.04.2022 REVISION NUMBER: 00

Auf dem Schüffel 1
D-58513 Lüdenscheid
Tel.: +49-2351 - 554-200
Fax +49 (2351) 554-861
info@assmann-wsw.com
www.assmann-wsw.com

PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 20.04.2022
MODIFICATION / REVISION DATE: 20.04.2022

AKSPTx xx	OLD VERSION	AKSPTx xx	NEW VERSION

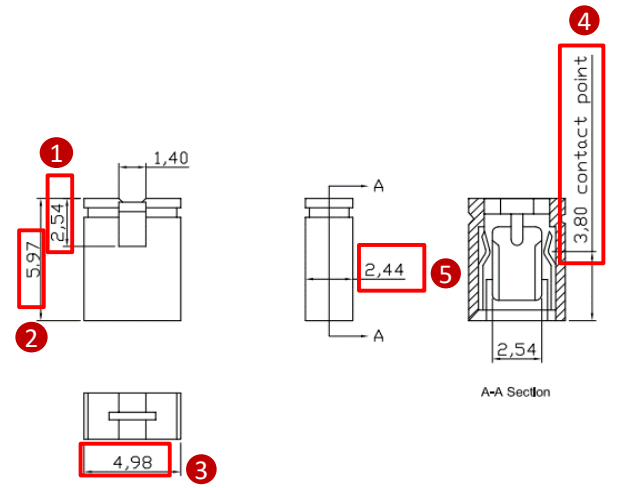

Scale	Free
TOLERANCE	
.X	±0.38
.XX	±0.25
.XXX	±0.13
DIM	TOL
X.°	±1°
Angle	TOL
UNIT	mm

6

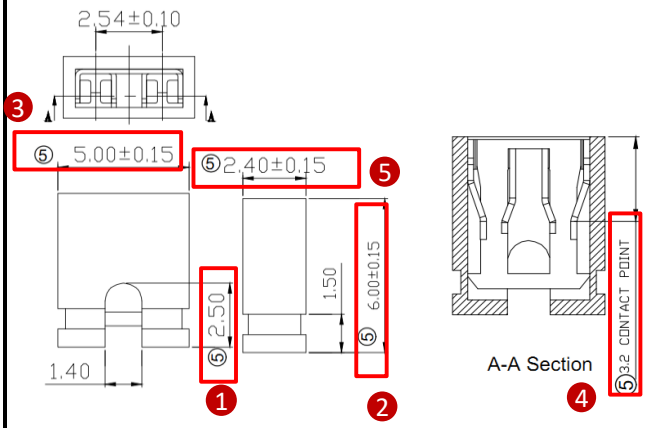

Scale	Free
TOLERANCE	
.X	±0.38
.XX	±0.25
.XXX	±0.15
DIM	TOL
X.°	±1°
Angle	TOL
UNIT	mm

6

FOR DETAIL, PLEASE TAKE ATTACHED NEW DRAWING: FOR REFERENCE

PCN REVISION HISTORY:
DATE OF REVISION: 20.04.2022 REVISION NUMBER: 00

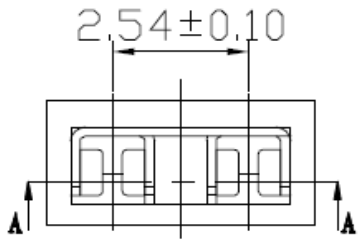

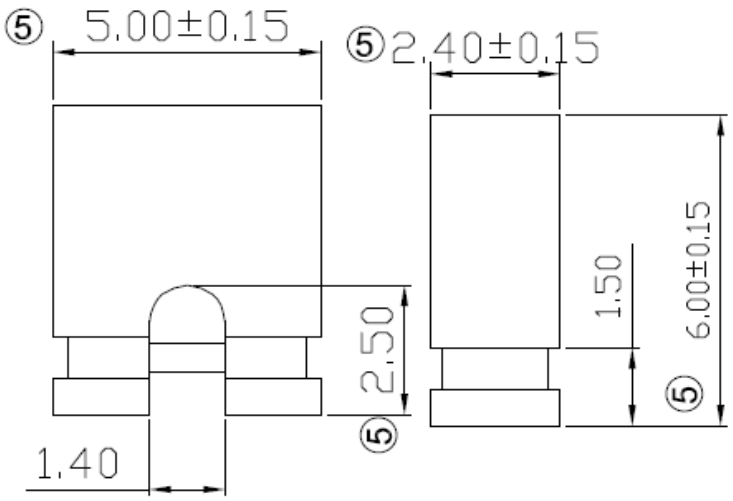

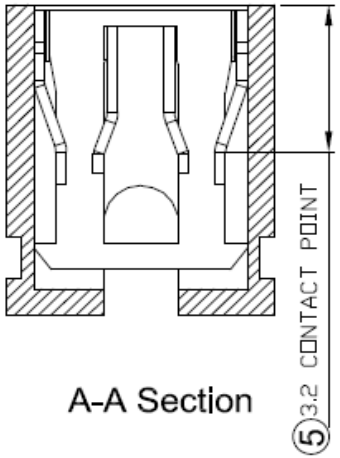

A-A Section

NOTES:

1. Insulation: 30% Glass Filled PBT, UL94V-0
② 2. Contact : Brass
3. Current Rating: 3A Max
4. Dielectric Voltage: 1000V rms / 1 minute
5. Insulation Resistance: 1000M ohm Min.
6. Contact Resistance: 30m ohm Max.
7. Operating and Storage Temperature: -40°C ~ +105°C
④ 8. Mating Cycles: 10 Min.

AKSPT/x - x

- Color:
  - GREY - Grey
  - RED - Red
  - BLUE - Blue
  - BLACK - Black
- Contact Area Plating: ④
  - G: Gold Flash

RoHS compliant
Unit:mm

Scale	Free	
TOLERANCE		
.X	±0.38	
.XX	±0.25	
⑤ .XXX	±0.15	
DIM	TOL	
X.°	±1°	
Angle	TOL	
UNIT	mm	

Id.	Modification	Date	Name
⑤	Change the plant	20.04.2022	Winnie
④	Update	07.06.2013	Winnie
③	Update the material of contact	15.10.2012	Amy
②	Update	27.07.2009	Rale
①	Drawn	29.10.1995	Hellwig

	Date	Name
Drawn	29.10.1995	Hellwig
Approved	20.04.2022	Winnie

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No. AKSPT/x-x

Drawing-No. ASS 0336 CO rev05

Replace

SHEET