

1

2

3

4

5

6

7

A

A

B

B

C

C

D

D



E

E


F

F

DB9 Female

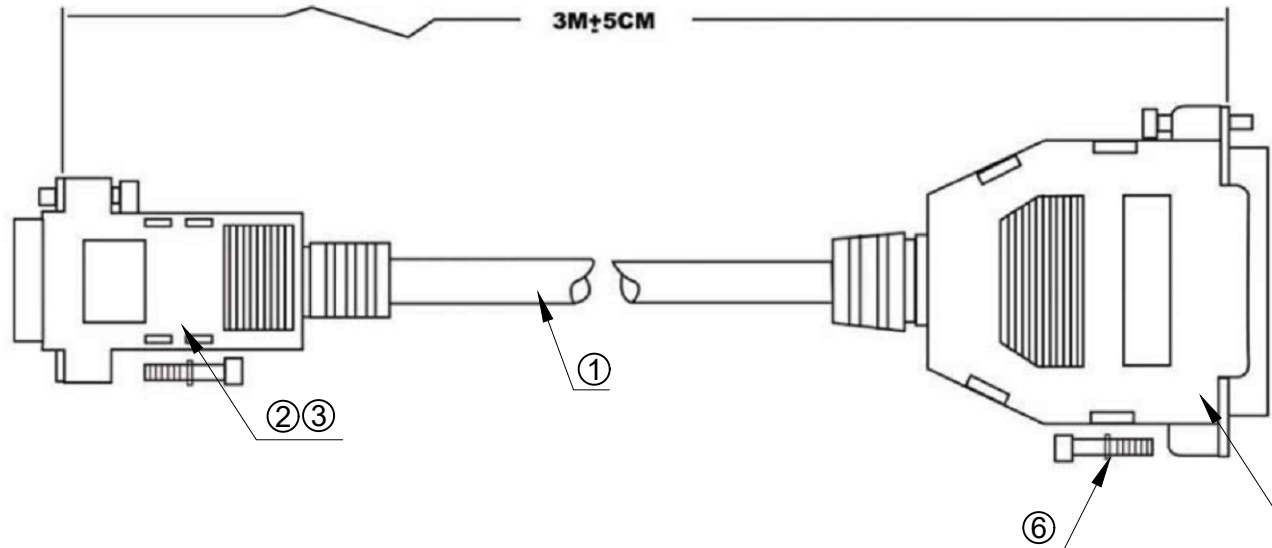

DB25 Female



Configuration:

DB9F

DB25F

1	8
2	2
3	3
4	6
5	7
6	20
7	5
8	4
9	22
Shield	Shield

⑥	Screw	#4-40UNC type	4	pcs
⑤	Housing	Snap Hood for DB25, Assembly type	1	pcs
④	CONN.	DB25 Female, normal type	1	pcs
③	Housing	Snap Hood for DB9, Assembly type	1	pcs
②	CONN.	DB9 Female, normal type	1	pcs
①	CABLE	28AWG, 9C+1+AL/MY,Beige, PVC Jacket, OD:6.0	1	pcs
NO:	NAME	DESCRIPTION	Q'TY	UNIT

RoHS compliant

Unit: mm

Scale Free

TOLERANCE

X.X ±0.40

X.XX ±0.25

X.XXX ±0.15

DIM TOL

Angle ±3°

Angle TOL

①	Drawn	08.11.2021	Daniel
Id.	Modification	Date	Name



Date Name

Drawn 08.11.2021 Daniel

Approved 08.11.2021 Daniel

Description:

Null Modem Cable
3.0 Meter

ASSMANN WSW-No.

AK124-3

Drawing-No.

ASS 10079 CA

rev00

Customer-No.

Sheet

1 / 1

1

2

3

4

5

6

7

H

H